


TR-FW20/TR-FB20/TR-FG20

- White
- Black
- Grey

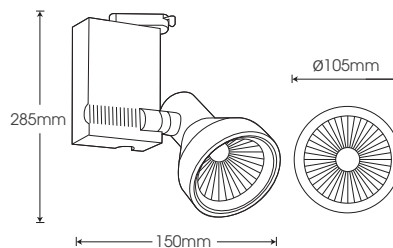


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-FW20/ TR-FB20/ TR-FG20	20W	CREE (USA)	36°	3000K	>80	1845lm
					>90	1615lm
				4000K	>80	1980lm
					>90	1770lm
				5000K	>80	1980lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

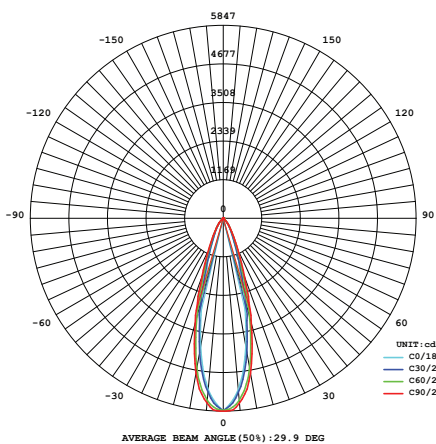

Height	AVR E	CENTER E	Diameter
1.50m	1937.04lx	2592.76lx	71.20cm
2.00m	1089.59lx	1459.43lx	94.94cm
4.00m	272.40lx	364.61lx	189.88cm
6.00m	121.07lx	162.05lx	284.82cm
10.00m	43.58lx	58.34lx	474.70cm

Angle: 26.7deg

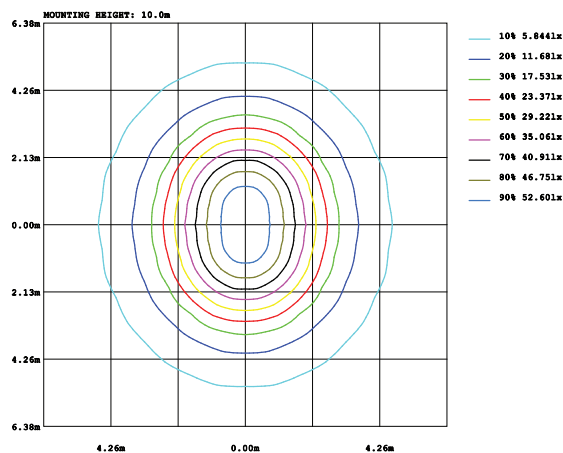

Parameter of TR-FW20/TR-FB20/TR-FG20 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point.
- Mount the rails on the fixed head.
 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails.

Note: Disconnect power, safety checking whole power system before construction. All radiator parts are not exposed directly to iron or steel

PACKING