


CL-BW15/ CL-BB15

RoHS

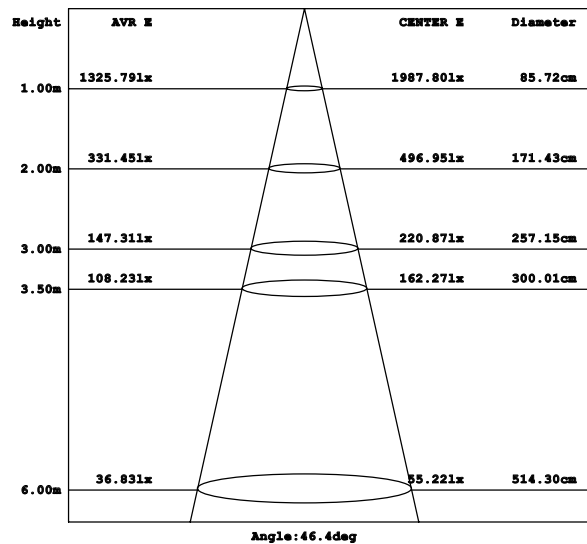
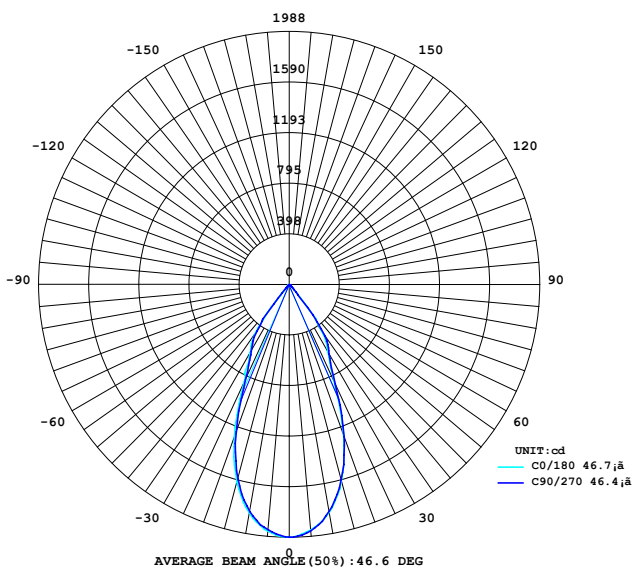
CE



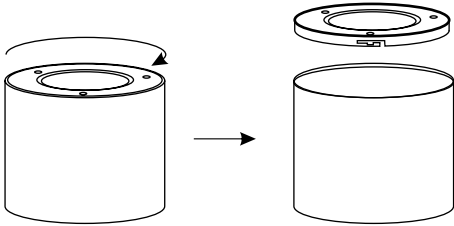
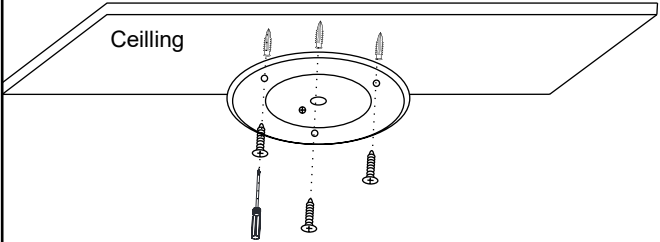
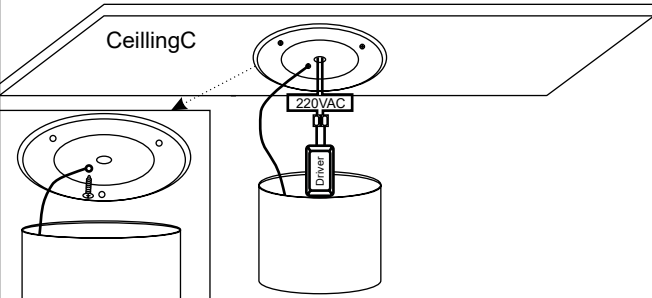
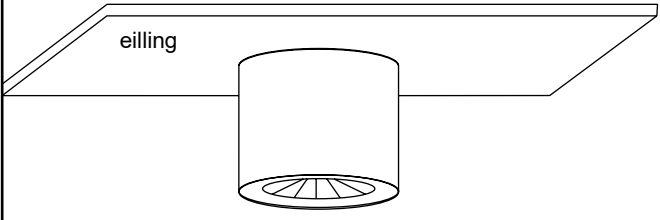
### SPECIFICATION

Model Code	CL-BW15/ CL-BB15
Power	15W
Efficiency	105lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø110xH120mm
Body Color	White/ Black
LED Source	CREE (USA)
CRI	Ra>80/90*
Beam Angle	60°
CCT	2700K/3000K/4000K/5000K
Lumen	1510lm(W), 1575m(N/C)
Life time	Min 30.000h
IP	IP20
Triac Dimmable	Available

### PHOTOMETRIC CURVES



## INSTALLATION INSTRUCTIONS

<p><b>1. Remove the ceiling cover from the light</b></p> 	<p><b>2. Use screws to fix the ceiling cover to the ceiling</b></p> 
<p><b>3. Fix the cable that holds the light to the ceiling cover. Connect Led driver to 220VAC power supply</b></p> 	<p><b>4. Install the light in the ceiling base and complete the installation</b></p> 
<p><b>Note:</b> - Disconnect the power supply before connecting the power          - Need to activate the warranty before use. If not activated, the applicable time is the factory time</p>	

## PACKING

Power	Package size	Quantity/Cartons	Carton size
15W	L160xW160xH110mm	16	L480xW330xH320mm

