

TR-FW25/TR-FB25/TR-FG25

2700K 3000K 3500K 4000K 5000K 6500K


>30,000
Hours

220-240
VAC

RoHS

CE

White
Black
Grey

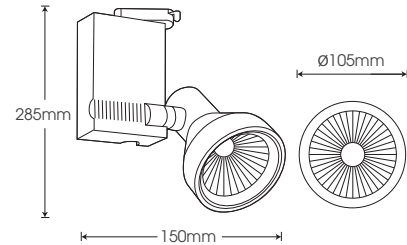


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-FW25/ TR-FB25/ TR-FG25	25W	CREE (USA)	36°	3000K	>80	2310lm
					>90	1885lm
				4000K	>80	2430lm
					>90	2030lm
				5000K	>80	2430lm
					>90	2030lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure


ISOLUX DIAGRAM

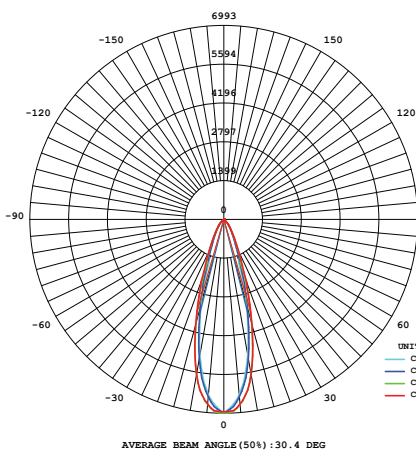

Height	AVR E	CENTER E	Diameter
1.50m	2289.32lx	3101.07lx	75.53cm
2.00m	1287.74lx	1744.35lx	100.71cm
4.00m	321.94lx	436.09lx	201.42cm
6.00m	143.08lx	193.82lx	302.14cm
10.00m	51.51lx	69.77lx	503.56cm

UNIT: cd
 — C0/180 28.2;ã
 — C30/210 28.9;ã
 — C60/240 32.1;ã
 — C90/270 32.5;ã

Angle: 28.3deg

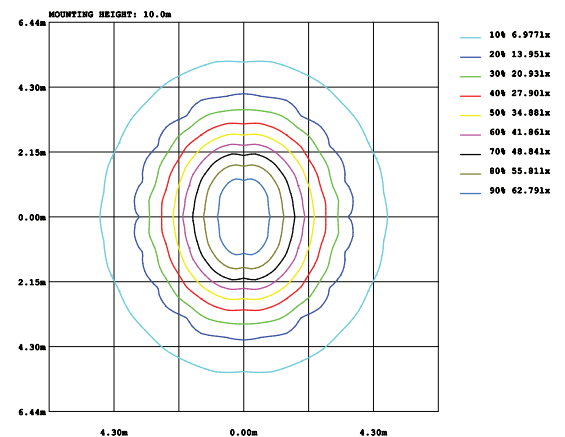

Parameter of TR-FW25/TR-FB25/TR-FG25 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulb
Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulong along the rails to firmly fixed

3. Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel