


CLP-BW15/ CLP-BB15



RoHS



SPECIFICATION


Model Code	CLP-BW15/ CLP-BB15
Power	15W
Efficiency	105lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø110xH120mm
Body Color	White/ Black
LED Source	CREE (USA)
CRI	Ra>80/90*
Beam Angle	60°
CCT	2700K/3000K/4000K/5000K
Lumen	1510lm(W), 1575m(N/C)
Life time	Min 30.000h
IP	IP20
Triac Dimmable	Available

PHOTOMETRIC CURVES

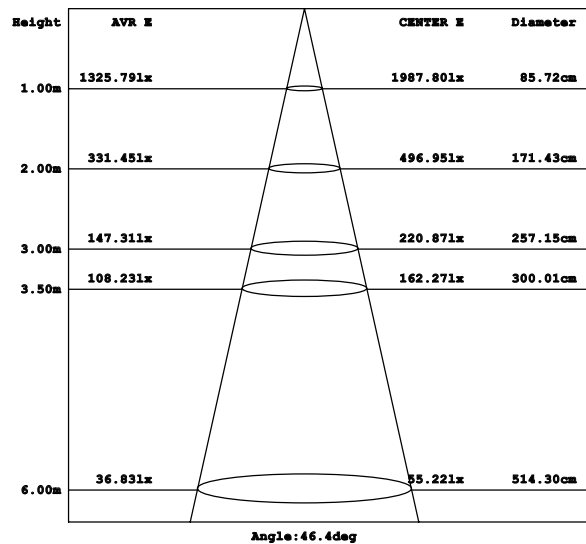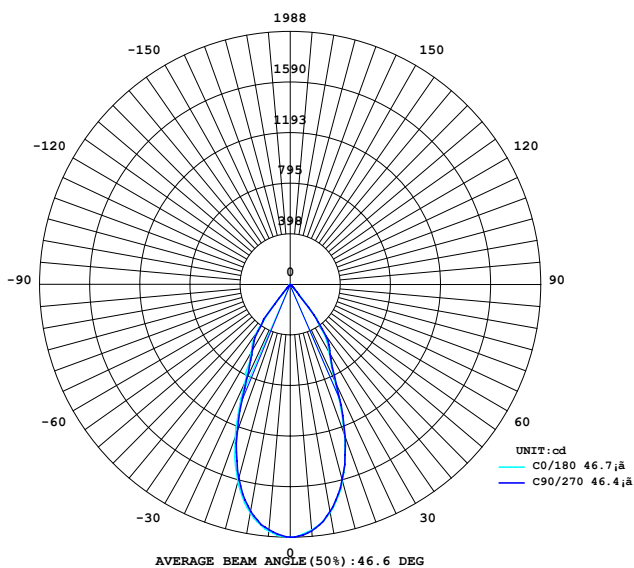


INSTALLATION INSTRUCTIONS


1. Install the U-bar in the ceiling

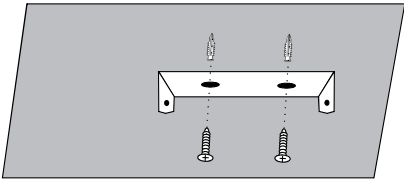


2. Connect LED driver to the power supply

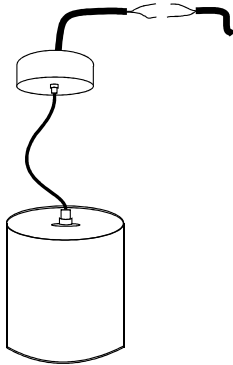

3. Install the lamp on the fixed U-bar

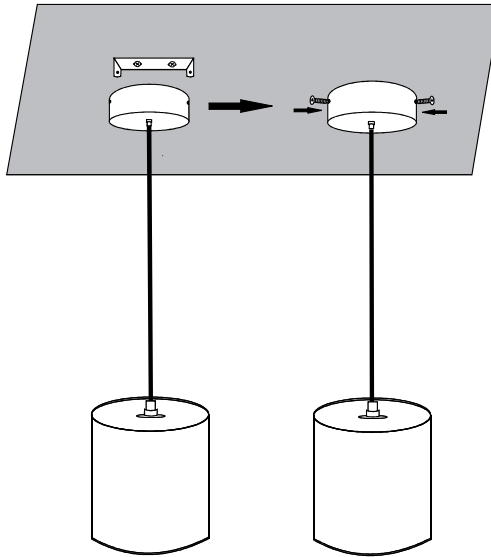

4. Finished installation

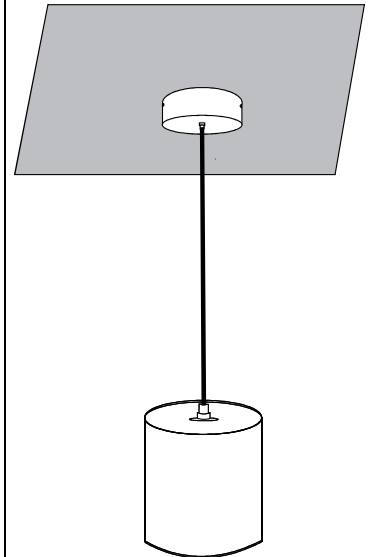

Note: - Disconnect the power supply before connecting the power
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
15W	L160xW160xH110mm	16	L480xW330xH320mm

