


UG-DS12

Silver



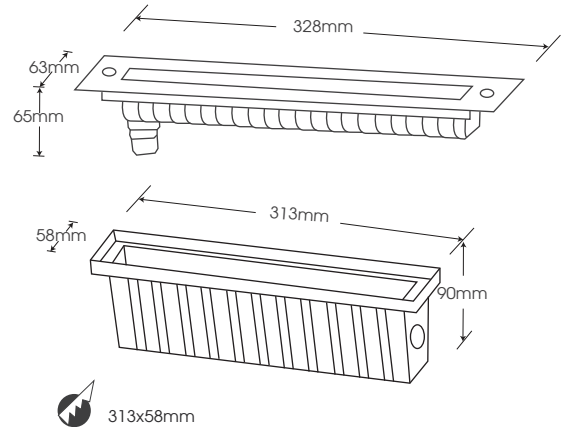


| Model | Power | Led source | Beam angle | CRI | Led Qty. | CCT | Flux |
|---------|-------|------------|-----------------------------------|-----|----------|-------|-------|
| UG-DS12 | 12W | OSRAM | Symmetry: 45° Asymmetric*: 45° | >80 | 6x2W | 3000K | 595lm |
| | | | | | | 6500K | 630lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

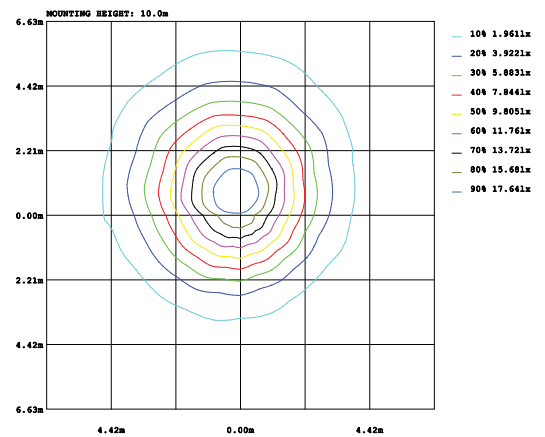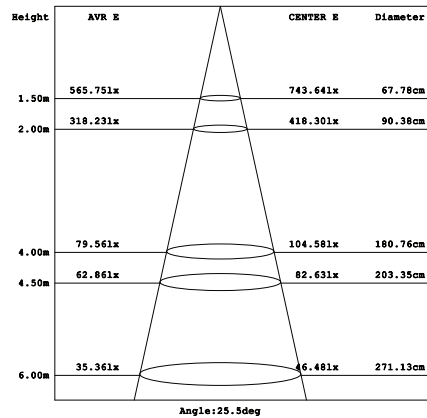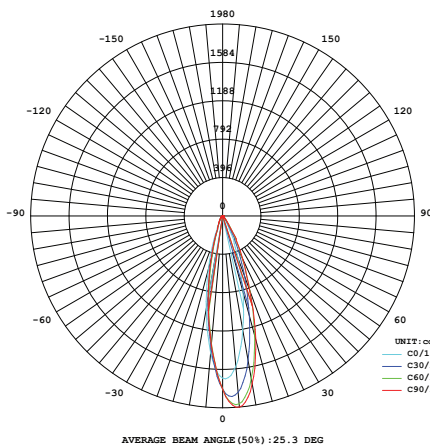

Parameter of UG-DS12 | CCT 3000K

INSTALLATION INSTRUCTIONS

PACKING

1. Disassemble the lamp and plastic stand

2. Pick the hole in the ground, placing the plastic in, fixing the plastic sole. Make sure the hole is not stagnant and drainage well

3. Connected Led Driver with DC24V power
 To prevent water from leaking into the interior of the lamp in an electric wire, the two connectors must be fitted with a connector or wrapped with tape.

4. Covered with silicone on the plastic sole, put the lamp in the plastic sole, screw fixed lights on the plastic sole

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

