

**DLR-DW6**



RoHS



**SPECIFICATION**


Model Code	DLR-DW6
Power	6W
Efficiency	100lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø62xH85mm
Hole size	Ø55mm
Body Color	White bodor
LED Source	CREE (USA)
CRI	Ra>80/90*
Beam Angle	10°/ 15°/ 24°/ 38°/ 60°
CCT	2700K/ 3000K/ 4000K/ 5000K
Lumen	545lm(W), 600lm(N/C)
Life time	Min 30.000h
IP	IP40

**PHOTOMETRIC CURVES Beam Angle 38°**

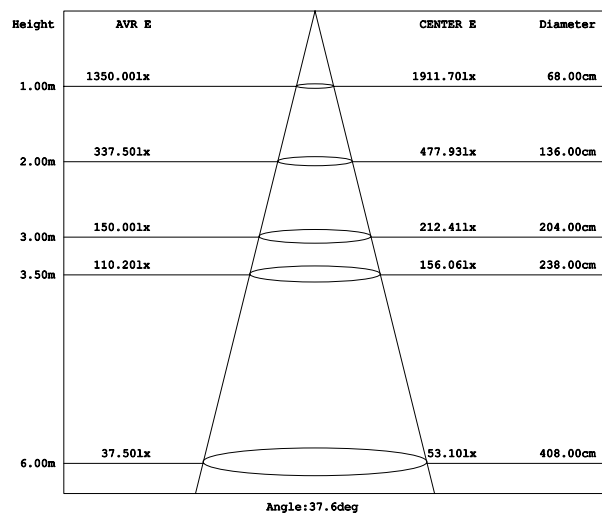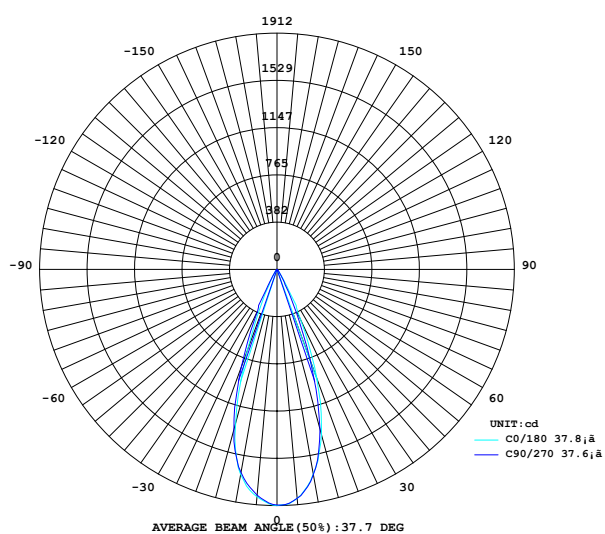


## INSTALLATION INSTRUCTIONS


1. Drill a hole on the ceiling




2. Connect LED driver to the power supply  
3. Connect LED driver to lamp

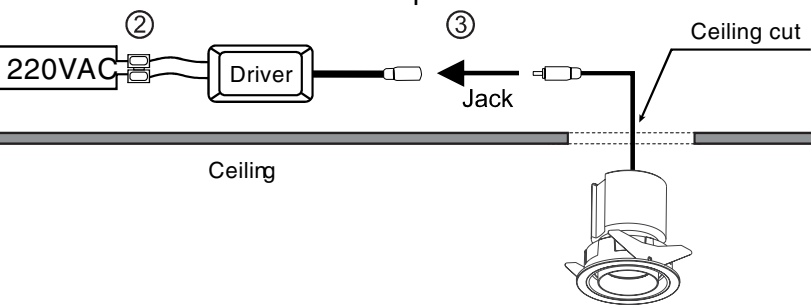

4. Push the lamp into the hole in the ceiling



5. Finished installation

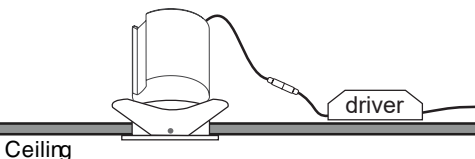

Note: - Disconnect the power supply before connecting the power  
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

## PACKING

Power	Package size	Quantity/Cartons	Carton size
6W	L120xW120xH90mm	30	L470xW370xH250mm

