ISO 9001:2015

| LED | IP40 | 220~240 VAC | RoHS | CE |

ES-CS3

☐ White

PARAMETER

Model	ES-CS3
Power	3W
Battery	Ni-Cd (1.2V 800mAh)
Charge	Auto
Full charge time	24 hours
Hours	3 hours
Function	Switch off circuit when fully charged
Installation	Pendant (2 sides) or wall mouted (1 sides)
Working temperature	-10°C ~ 40°C

ALTERNATIVES

S1
S2
S3
S4

S5
S6
S 7
S8

PACKING

1 pcs →

175mm
50mm
360mm

VinaLED®
Dẫn đầu về độ sáng và chất lượng
ISO 9001:2015

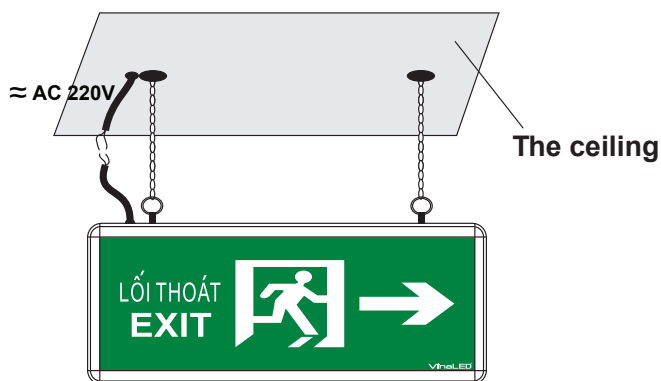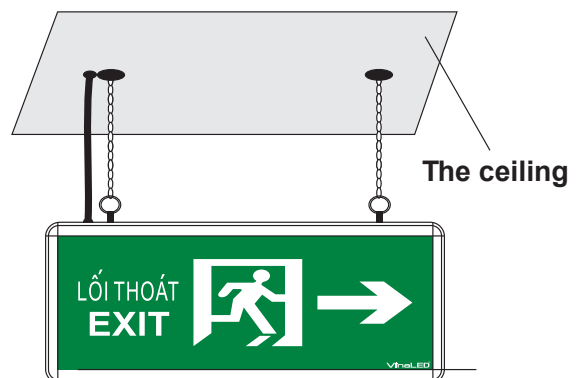| LED | IP40 | 220~240 VAC | RoHS | CE |
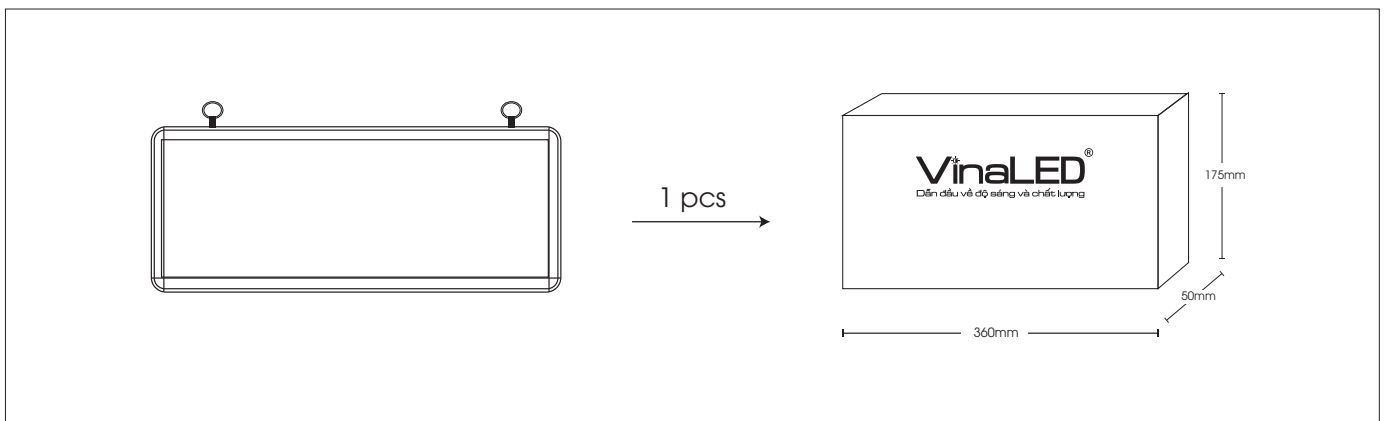
INSTALLATION INSTRUCTIONS

Hang up install

1. Fixed fitting the light: Install one end of the two hanging lights to the ceiling. One end of the hook hanging hook on the hook is available on the light. Then connect the light to AC220V power
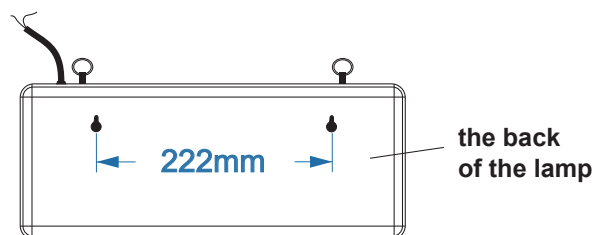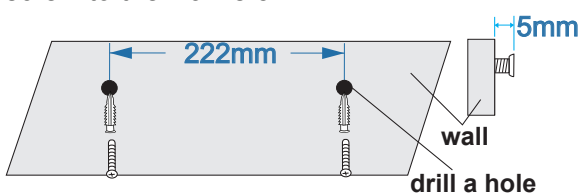
≈ AC 220V

The ceiling

LỐI THOÁT **EXIT**

2. Finish

The ceiling

LỐI THOÁT **EXIT**

Note: Turn off the power, check the entire power system before installation

Wall mounting

1. Locate the light, drill two holes on the wall with a distance of 222mm. Install the wedge and screw, do not twist head screw into close the wall, leaving the gap from the head screw to the wall is 5mm

5mm

222mm

wall

drill a hole

222mm

the back of the lamp

2. Install the light to the pre-installed position, connect the lamp to AC220V power supply

AC 220V

wall

LỐI THOÁT **EXIT**

3. Finish

wall

LỐI THOÁT **EXIT**

Note: Turn off the power, check the entire power system before installation