


FL-FB12

Flood light



RoHS



SPECIFICATION


Model Code	FL-FB12
Power	12W
Efficiency	110lm/W (4000K)
Input Voltage	100-240VAC
Size	150x110x47mm
Body Color	Black
LED Source	Lumileds (USA)
CRI	Ra>80
Beam Angle	15°/ 20°/ 60°/ 90°/ 120°/ T2M/ T3M
CCT	2700K/ 3000K/ 4000K/ 5700K/ Color
Lume	1.250lm(W), 1.320lm(N/C)
Life time	Min 30.000h
IP	IP66
Weight	0.6kg

PHOTOMETRIC CURVES Beam Angle 120°

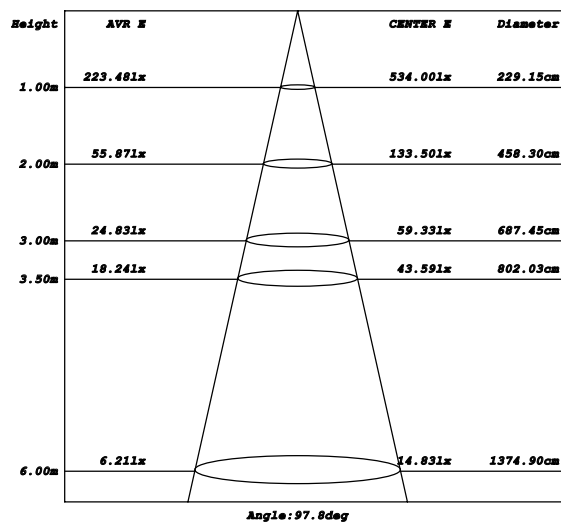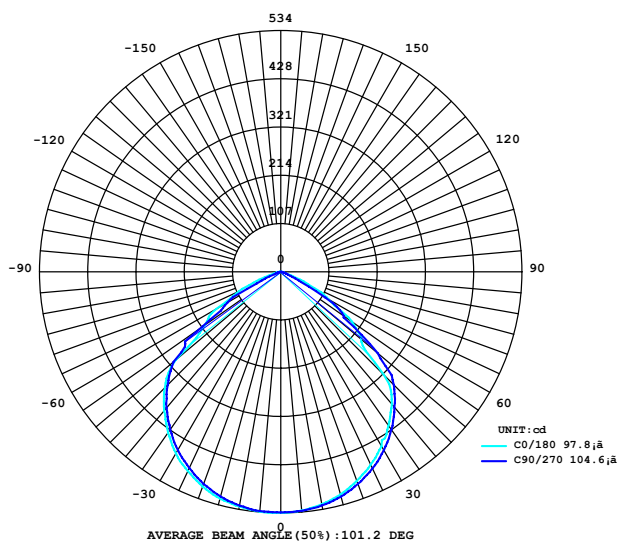


INSTALLATION INSTRUCTIONS


1. Remove frame out of the light

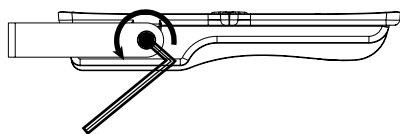




2. Attach the bracket fixed to the position to install the lamp



3. Install the lights on the fixed racks

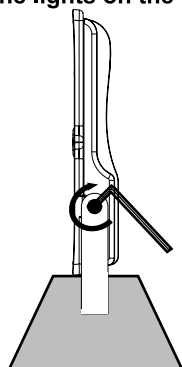

4. connect the wires to the source 220VAC

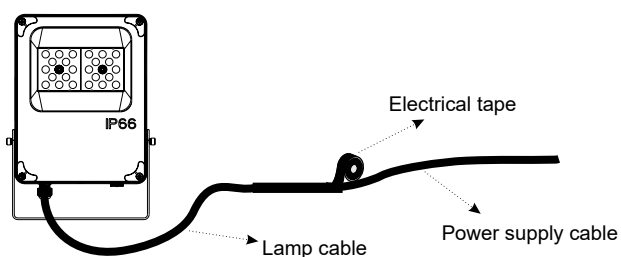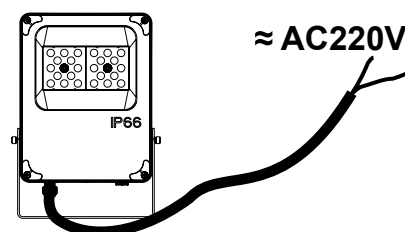

Attention :

1. Install by qualified electricians only .
2. Make sure that the supply voltage is disconnected before installation.
3. Make sure the voltage is suitable with the lamps ,and L/N/G connect properly.
4. Don't open the lamps without Manufacturer's Authorized

PACKING

Power	Package size	Quantity/Cartons	Carton size
12W	L196xW130xH55mm	30	L540xW360xH310mm

