


OS-FG12/ OSA-FG12



RoHS

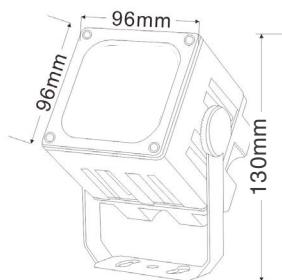

### SPECIFICATION


Model Code	OS-FG12/ OSA-FG12
Power	12W
Efficiency	85lm/W (4000K)
Input Voltage	85-265VAC/24VDC(0.62A)
Size	96x96x130mm
Body Color	Grey
LED Source	CREE (USA)
CRI	80
Beam Angle	5°/ 10°/ 15°/ 30°/ 45°/ 10x45°/ 10x80°/ 20x40°/ 30x60°
CCT	2700K/ 3000K/ 4000K/ 5700K/ Color
Lumen	900lm(W), 1020lm(N/C)
Life time	Min 30.000h
IP	IP65

### PHOTOMETRIC CURVES Beam Angle 30°

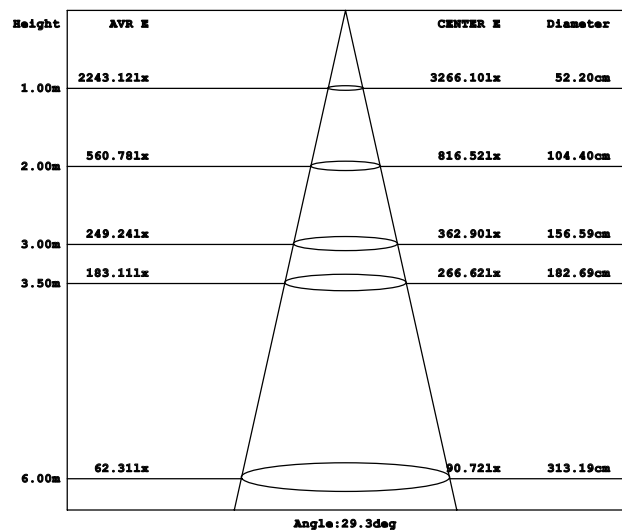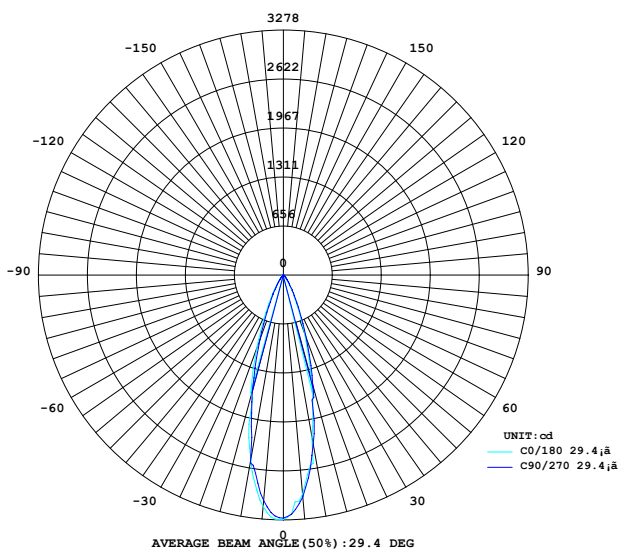


## INSTALLATION INSTRUCTIONS


1. Remove the lamp bracket




3. Connect the lamp body to the bracket. Then fix them with stainless steel screws





2. Attach and screw on to make it into position

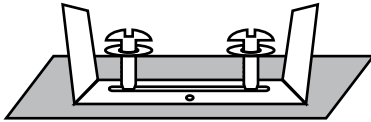

4. Connect the power lead to mains supply

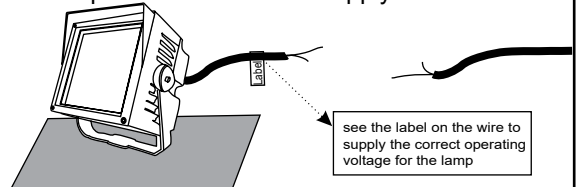

5. Wrap electrical tape correctly, make sure water can't get inside

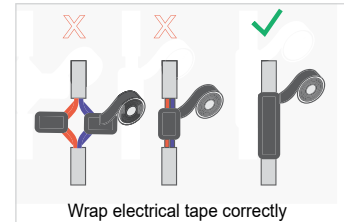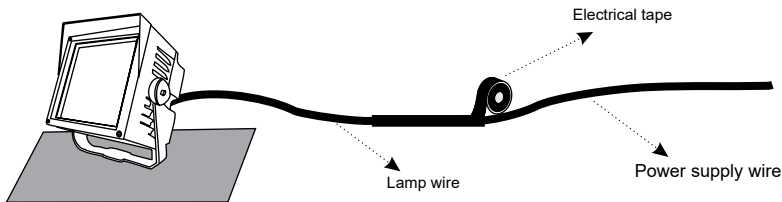

- Note:
- Disconnect the power supply before connecting the power
  - Housing material is Aluminum, do not install near sea water or high acidity environment
  - Need to activate the warranty before use. If not activated, the applicable time is the factory time

## PACKING

Power	Package size	Quantity/Cartons	Carton size
12W	L160xW160xH110mm	16	L480xW330xH320mm

