
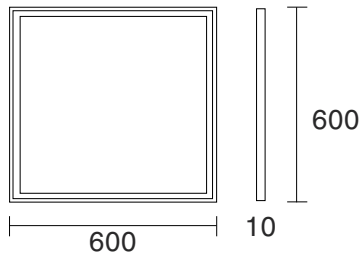


PL-6060DS42/ PL-6060DW42





583x583mm

**SPECIFICATION**


Model Code	PL-6060DS42/ PL-6060DW42
Power	42W
Efficiency	105lm/W (4000K)
Input Voltage	220-240VAC
1-10V Dimmable	Available
Size	600x600x10mm
Hole size	583x583mm
Body Color	White/ Silver
LED Source	Bridgelux (USA)
CRI	Ra>80
Beam Angle	120°
CCT	3000K/ 4000K/ 6500K
Lumen	4205lm(W) ,4410lm (N/C)
Life time	Min 30.000h
IP	IP30/IP65

**PHOTOMETRIC CURVES**

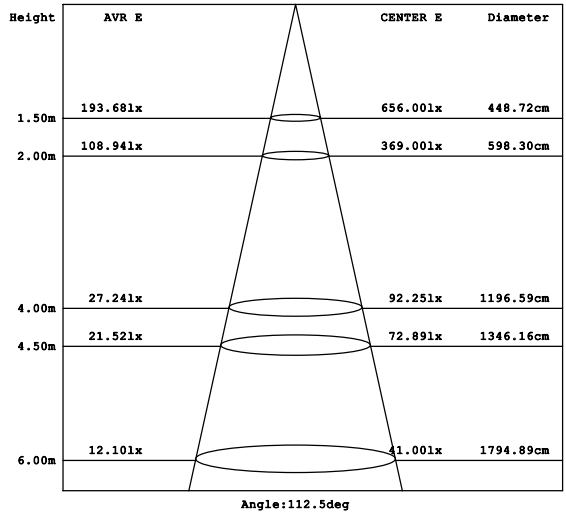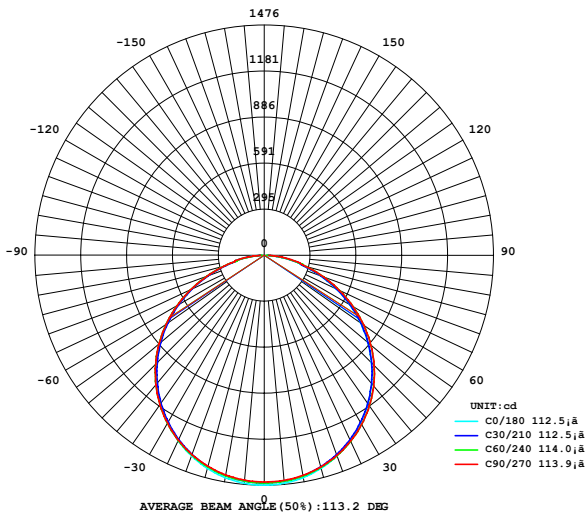


## INSTALLATION INSTRUCTIONS


### 1. Assemble the removable bars into a fixed frame.

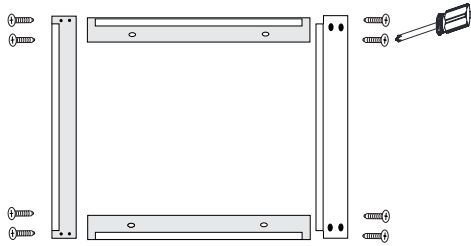


### 2. Fix the frame to the ceiling

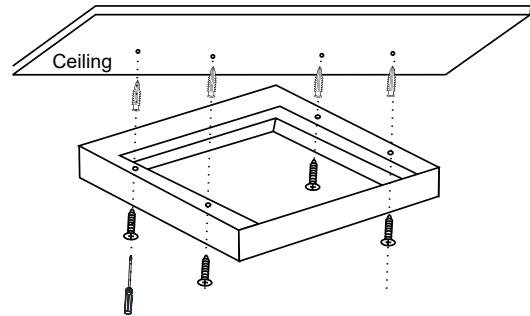


### 3. Disassemble 1 bar of the case frame to the outside.

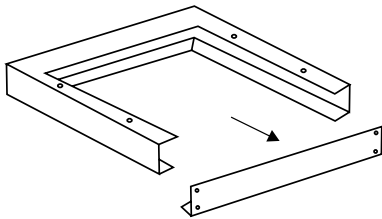


### 4. Connect LED driver to the power supply, connect LED driver to lamp

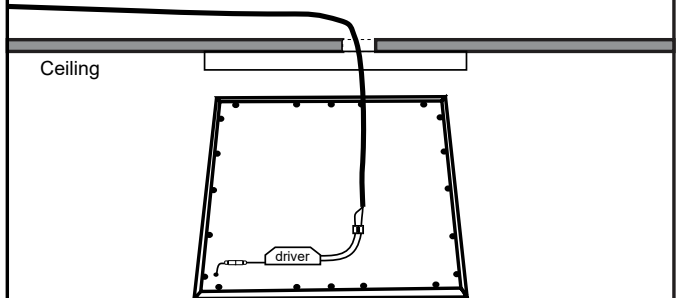

### 5. Push the lamp into the case frame

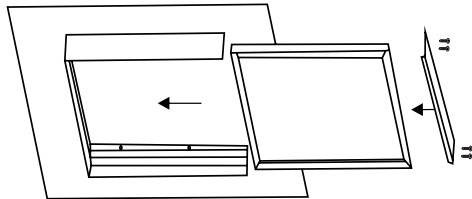

### 6. Finished installation

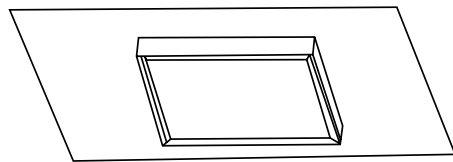

Note: - Disconnect the power supply before connecting the power  
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time.

## PACKING

Power	Package size	Quantity/Cartons	Carton size
42W	L660xW660xH45mm	5	L670xW270xH670mm

