


PL-R09

White

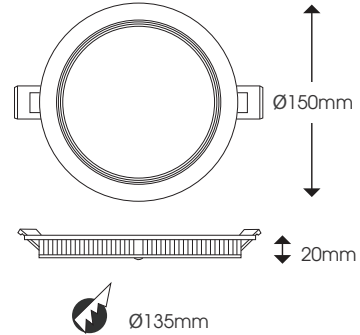

3000K 4000K 6500K




>30.000 Hours 85-265 VAC RoHS CE

Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-R09	9W	Bridgelux (USA)	120°	3000K	>80	720lm
				4000K	>80	750lm
				6500K	>80	750lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

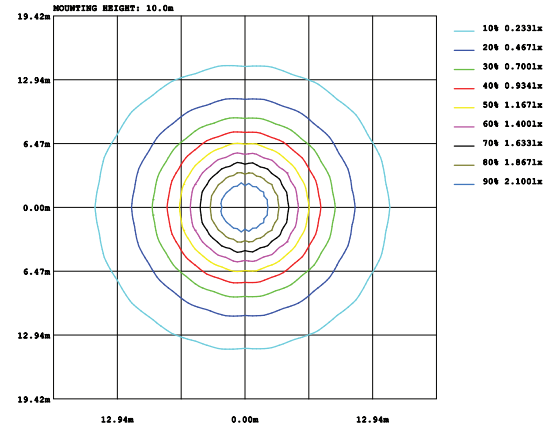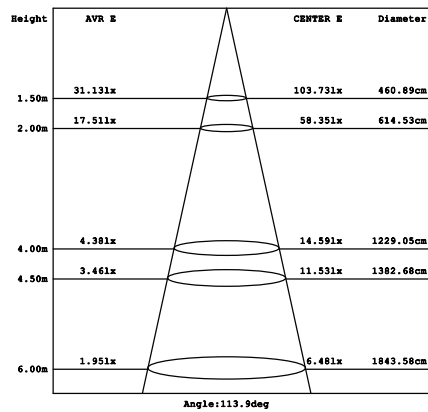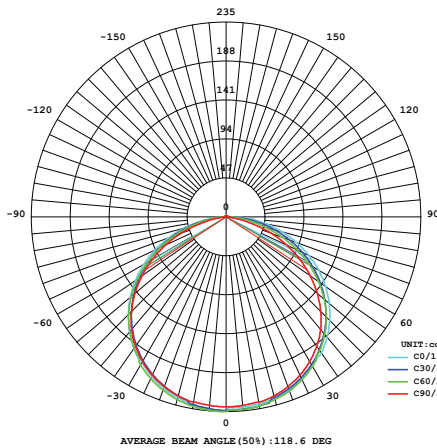

Parameter of PL-R09 | CCT 4000K

INSTALLATION INSTRUCTIONS

1. Ceiling cut

2. Install pat

3. Connected Led Driver with 220VAC power
4. Connected Led Driver with lamp

5. Put the lamp on the ceiling

PACKING

