


3000K 4000K 6500K



## PL-R18M

White



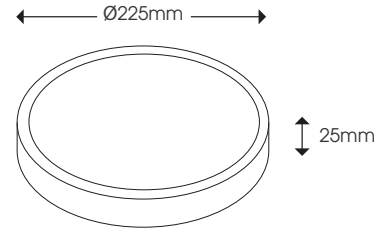


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-R18M	18W	Bridgelux (USA)	120°	3000K	>80	1750lm
				4000K	>80	1920lm
				6500K	>80	1920lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

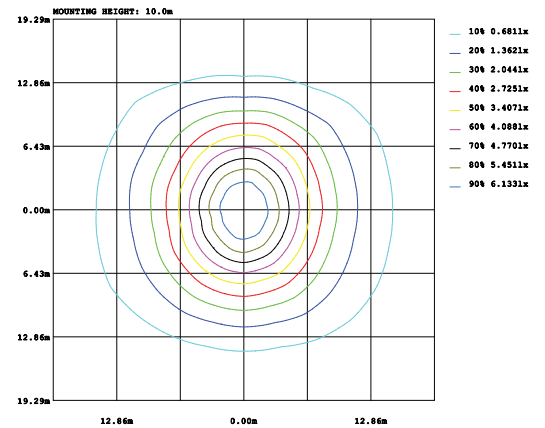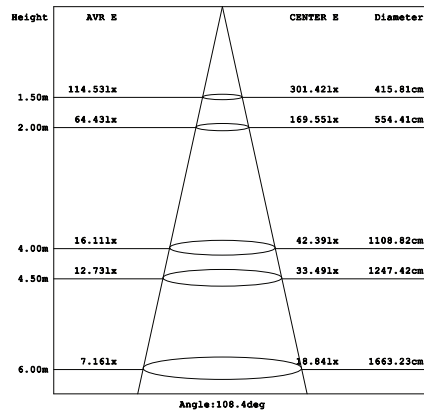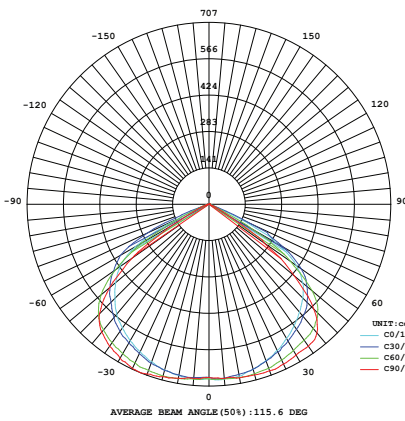

Parameter of PL-R18M | CCT 6500K

### INSTALLATION INSTRUCTIONS

### PACKING

- Install the Pat U on the ceiling
- Connected Led Driver with 220VAC power
- Install the lamp on the U-bar

Note: Turn off the power, check the entire power system before installation.  
All heat sinks do not come in direct contact with steel and iron

1 pcs  
10 pcs

ROBOLED®  
Chiếu sáng mọi nhà