


PL-S12

White



3000K 4000K 6500K

>30.000 Hours 85-265 VAC RoHS CE



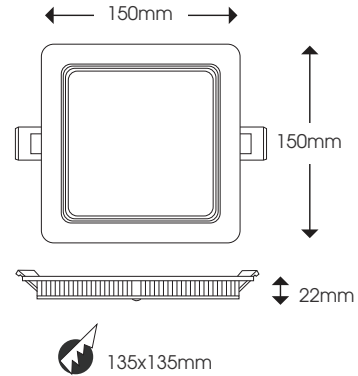


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-S12	12W	Bridgelux (USA)	120°	3000K	>80	915lm
				4000K	>80	980lm
				6500K	>80	980lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

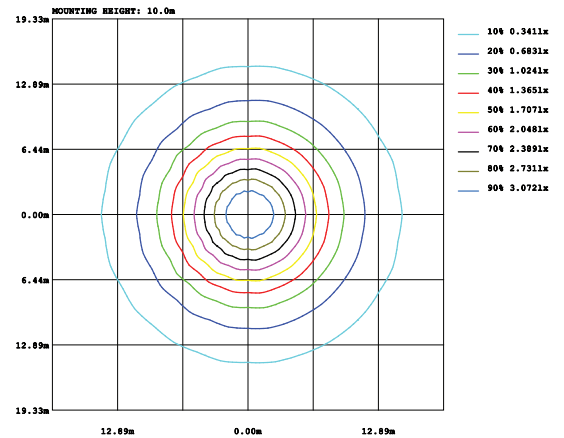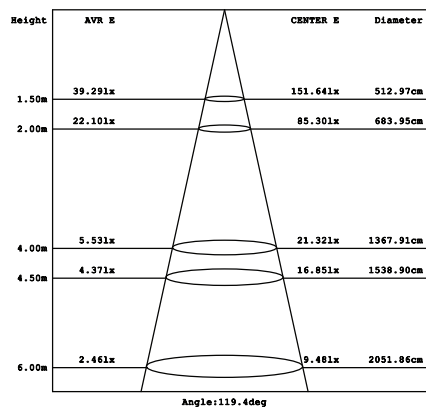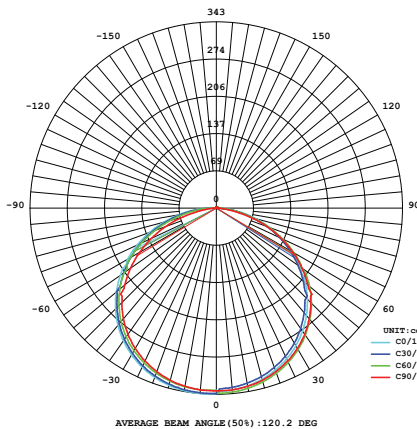

Parameter of PL-S12 | CCT 4000K

INSTALLATION INSTRUCTIONS

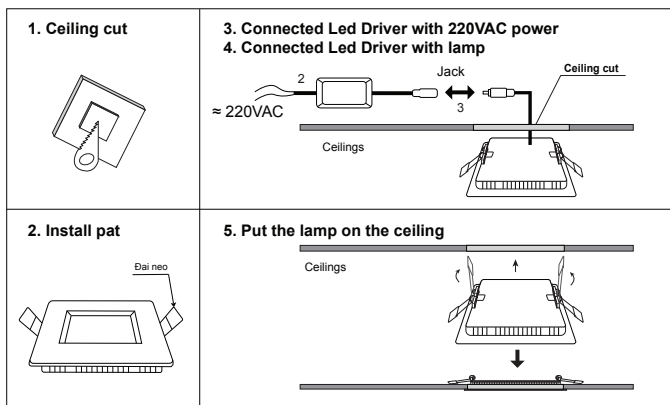

PACKING

