


PL-S15M

White



3000K 4000K 6500K



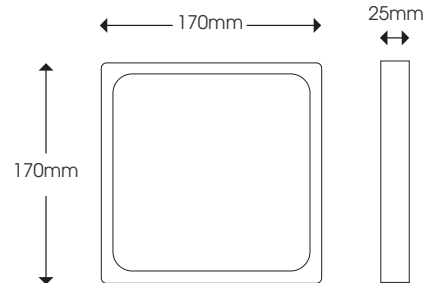


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-S15M	15W	Bridgelux (USA)	120°	3000K	>80	1530lm
				4000K	>80	1670lm
				6500K	>80	1670lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

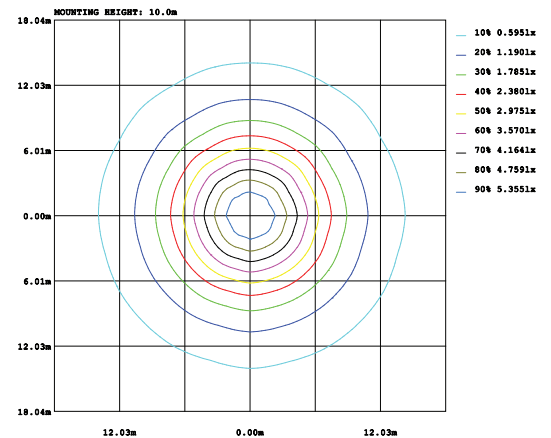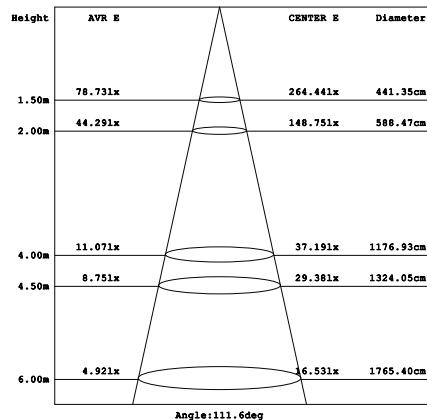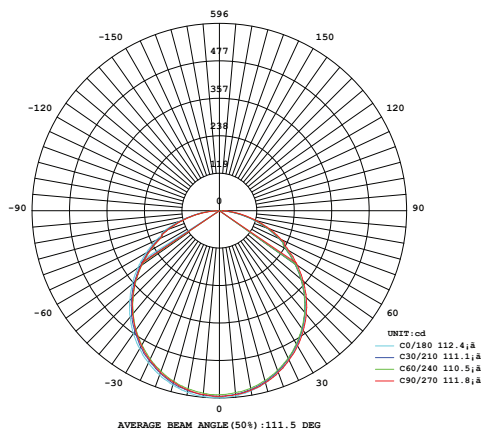


Parameter of PL-S15M | CCT 6500K


INSTALLATION INSTRUCTIONS

PACKING


1. Install the Pat U on the ceiling




2. Connected Led Driver with 220VAC power




3. Install the lamp on the U-bar

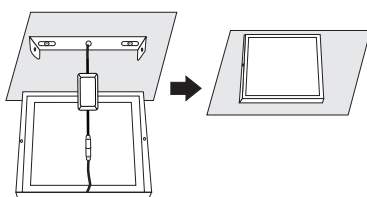

Note: Turn off the power, check the entire power system before installation.
 All heat sinks do not come in direct contact with steel and iron



1 pcs



14 pcs

