
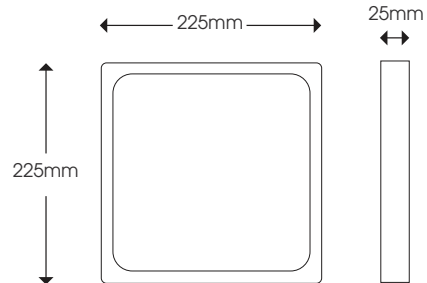


PL-S18M

White



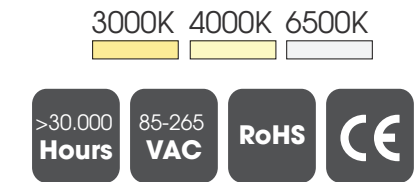


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-S18M	18W	Bridgelux (USA)	120°	3000K	>80	1750lm
				4000K	>80	1920lm
				6500K	>80	1920lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

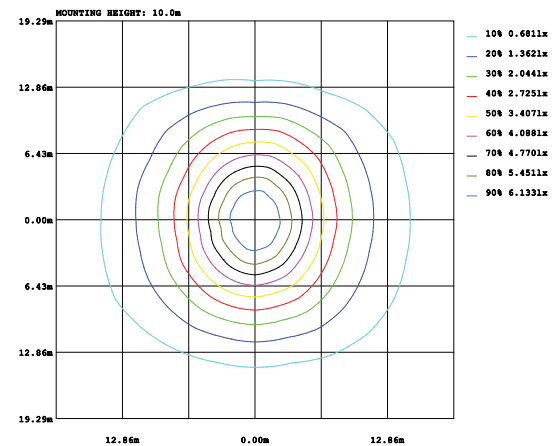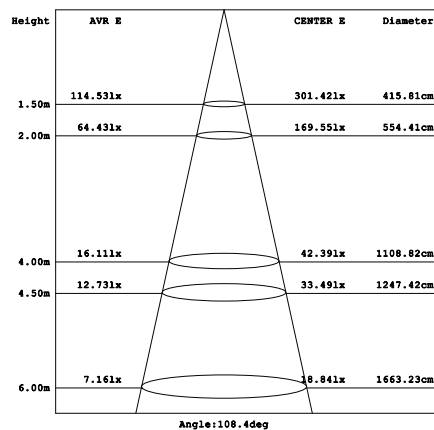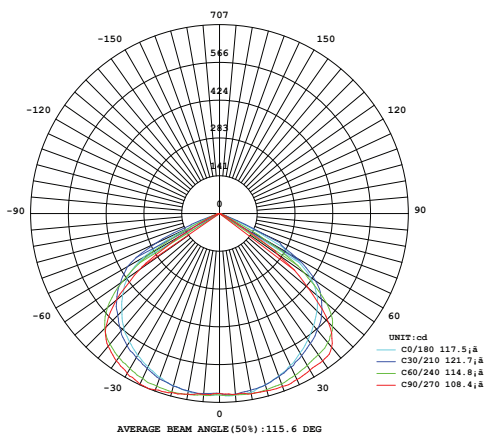


Parameter of PL-S18M | CCT 6500K


INSTALLATION INSTRUCTIONS

PACKING


1. Install the Pat U on the ceiling



2. Connected Led Driver with 220VAC power



3. Install the lamp on the U-bar

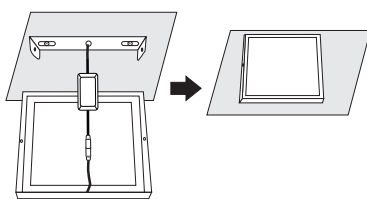

Note: Turn off the power, check the entire power system before installation.
 All heat sinks do not come in direct contact with steel or iron

