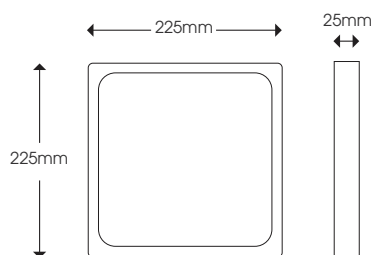


PL-S22M

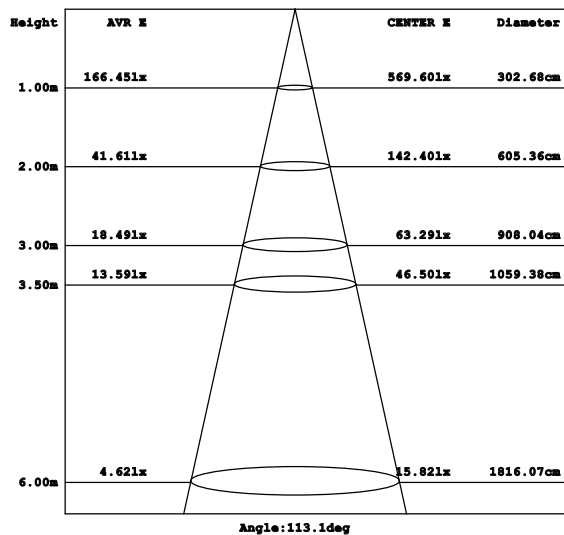
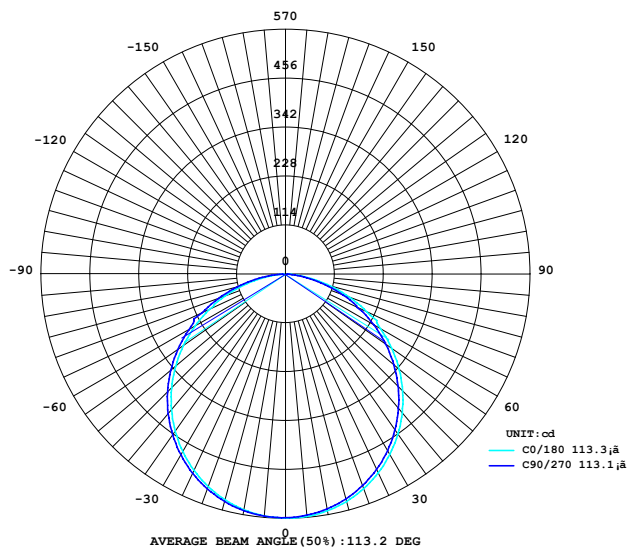
RoHS





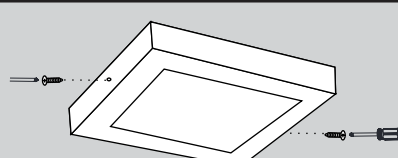

## SPECIFICATION

Model Code	PL-S22M
Power	22W
Efficiency	75lm/W (4000K)
Input Voltage	85-265VAC
Size	225x225xH25mm
Body Color	White
LED Source	Bridgelux (USA)
CRI	Ra>80
CCT	3000K/ 4000K/ 6500K
Lumen	1625lm(W), 1650lm(N/C)
Life time	Min 30.000h
IP	IP30

## PHOTOMETRIC CURVES



## INSTALLATION INSTRUCTIONS

<p><b>1. Fix the installation bracket with screws on the ceiling</b></p>	<p><b>2. Connect LED driver to the power supply</b> <b>3. Connect LED driver to lamp</b></p>
<p>Ceiling</p> 	
<p><b>4. Fix the ceiling light into the installation bracket with screws</b></p>	<p><b>5. Finished installation</b></p>
<p>Ceiling</p> 	<p>Ceiling</p> 
<p>Note: - Disconnect the power supply before connecting the power - Need to activate the warranty before use. If not activated, the applicable time is the factory time.</p>	

## PACKING

Power	Package size	Quantity/Cartons	Carton size
22W	L225xW225xH40mm	10	L420xW240xH240mm

