


## PLX-R15

White



3000K 4000K 6500K

>30.000 Hours 85-265 VAC RoHS CE



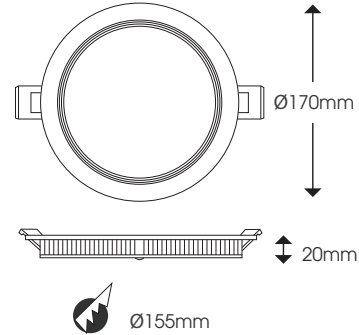


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PLX-R15	15W	Bridgelux (USA)	120°	3000K	>80	1200lm
				4000K	>80	1280lm
				6500K	>80	1280lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

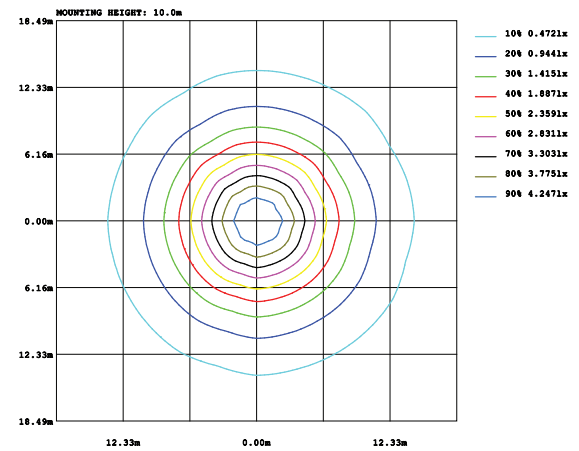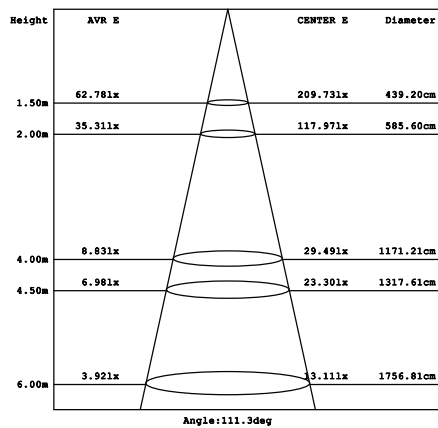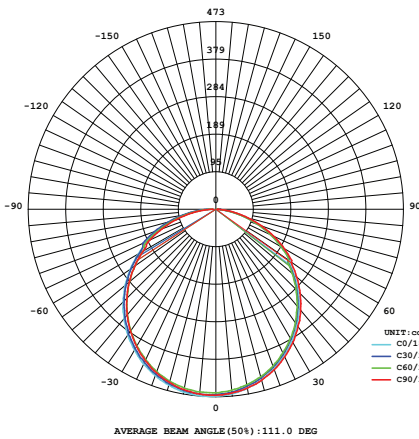

Parameter of PLX-R15 | CCT 4000K

### INSTALLATION INSTRUCTIONS

**1. Ceiling cut**

**3. Connected Led Driver with 220VAC power**  
**4. Connected Led Driver with lamp**

**2. Install pat**

**5. Put the lamp on the ceiling**

### PACKING

1 pcs

180mm x 180mm x 40mm

14 pcs

420mm x 420mm x 240mm