


Panel Downlight

PLX-R15



RoHS

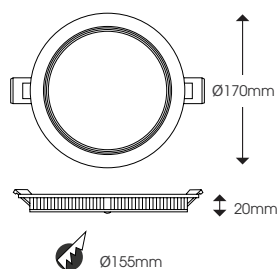

SPECIFICATION


Model Code	PLX-R15
Power	15W
Efficiency	90lm/W (4000K)
Input Voltage	85-265VAC
Size	Φ170 x H20mm
Hole size	Φ155mm
Body Color	White
LED Source	Bridgelux (USA)
CRI	Ra>80
CCT	3000K/ 4000K/ 6500K
Lumen	1310lm(W), 1350lm(N/C)
Life time	Min 30.000h
IP	IP30

PHOTOMETRIC CURVES

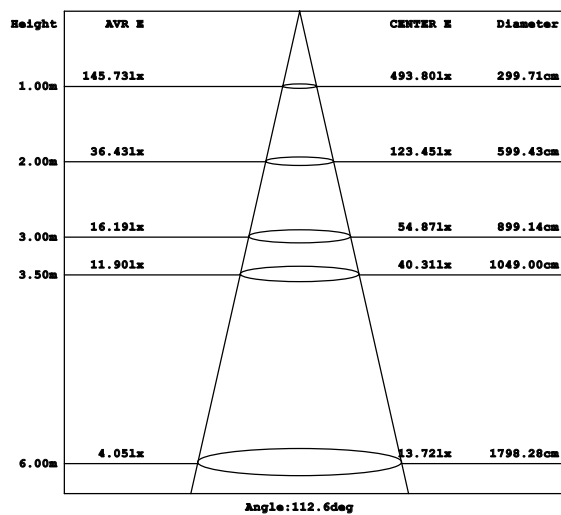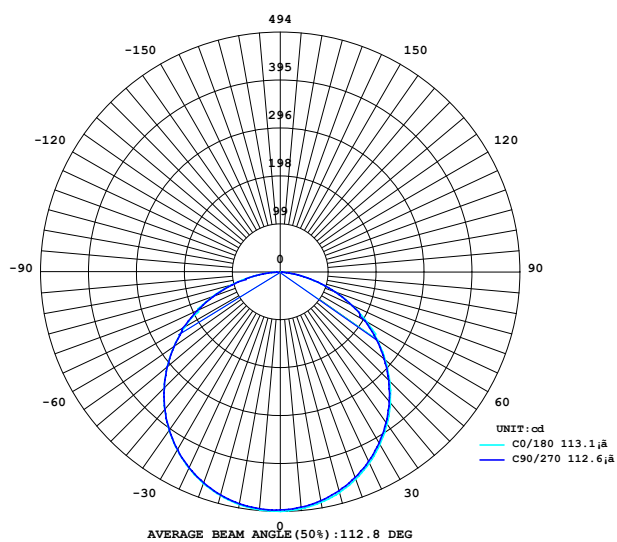


INSTALLATION INSTRUCTIONS


1. Drill a hole on the ceiling




2. Connect LED driver to the power supply
3. Connect LED driver to lamp

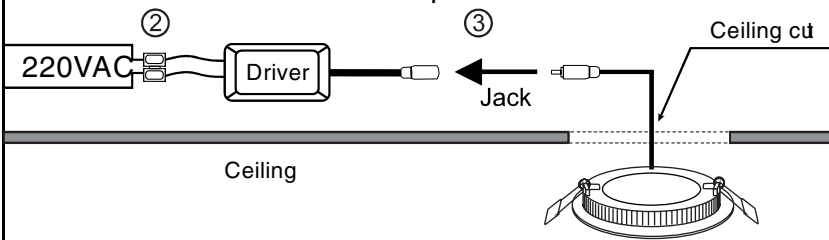

4. Push the lamp into the hole in the ceiling



5. Finished installation



Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
15W	L180xW180xH40mm	40	L740xW430xH190mm

