


ST-AG100



RoHS




SPECIFICATION

Model Code	ST-AG100
Power	100W
Efficiency	130lm/w (4000K)
Input Voltage	85-265VAC
Size	725x275x80mm
Weight	5.4Kg
Body Color	White Grey
LED Source	Bridgelux (USA)
CRI	Ra>70
Beam Angle	135x75°
CCT	3000K/ 4000K/ 6000K
Lumen	12.865lm(W), 13.000lm(N/C)
Life time	Min 50.000h
IP	IP66
Installation	≤ Ø60mm

PHOTOMETRIC CURVES

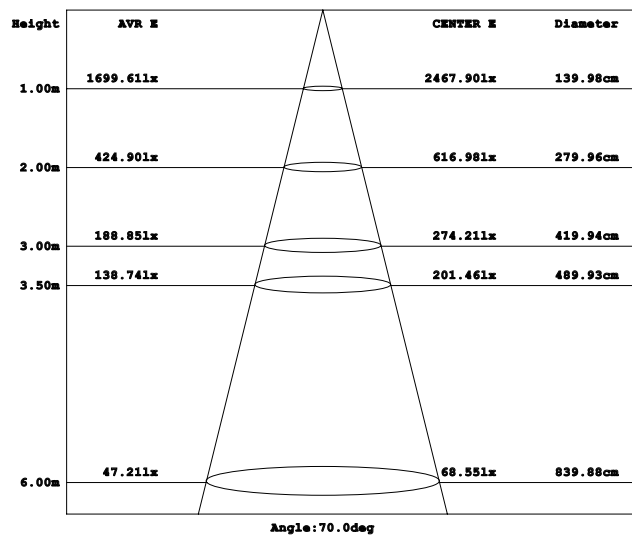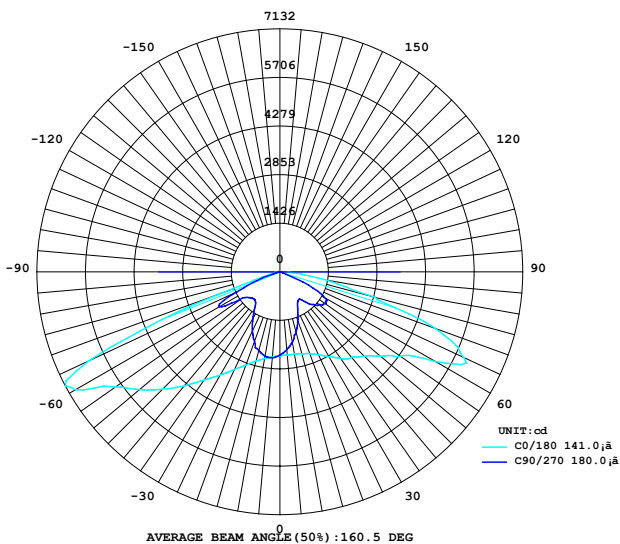

INSTALLATION INSTRUCTIONS

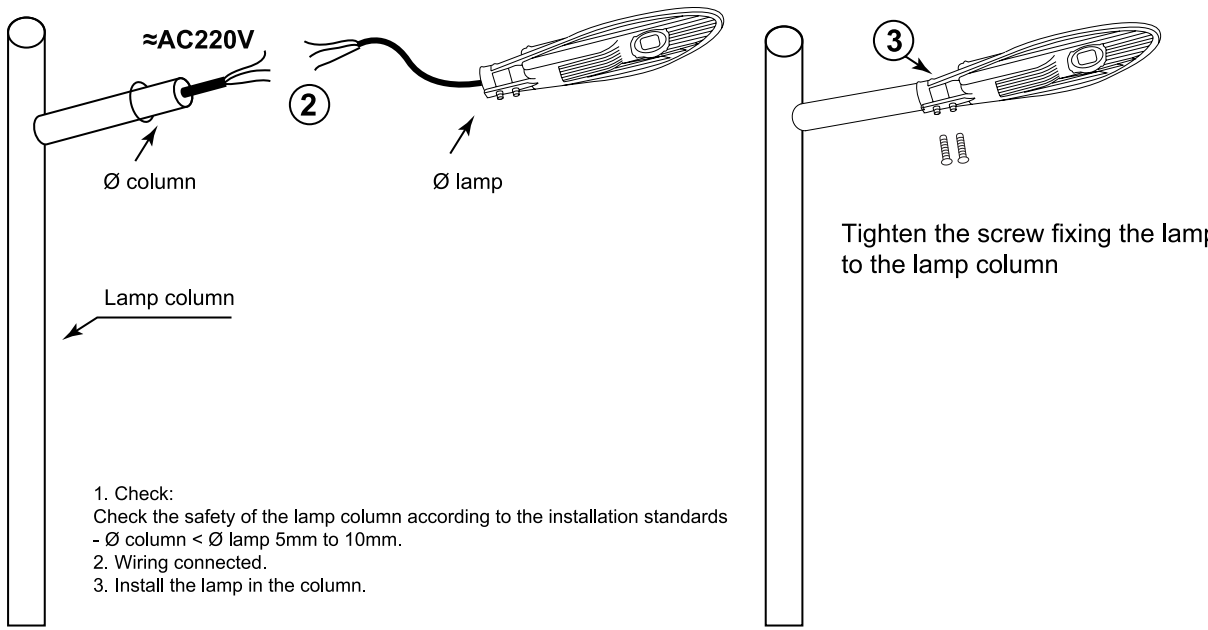

\approx AC220V

Ø column

Ø lamp

Lamp column

2

3

Tighten the screw fixing the lamp to the lamp column

1. Check:
Check the safety of the lamp column according to the installation standards
- Ø column < Ø lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.

Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
100W	L770xW330xH130mm	1	-

