


ST-AG120



RoHS

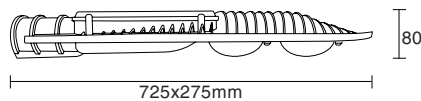


## SPECIFICATION

Model Code	ST-AG120
Power	120W
Efficiency	125lm/w (4000K)
Input Voltage	85-265VAC
Size	725x275x80mm
Weight	5.4Kg
Body Color	White Grey
LED Source	Bridgelux (USA)
CRI	Ra>70
Beam Angle	135x75°
CCT	3000K/ 4000K/ 6000K
Lumen	14.825lm(W), 15.000lm(N/C)
Life time	Min 50.000h
IP	IP66
Installation	≤ Ø60mm

## PHOTOMETRIC CURVES

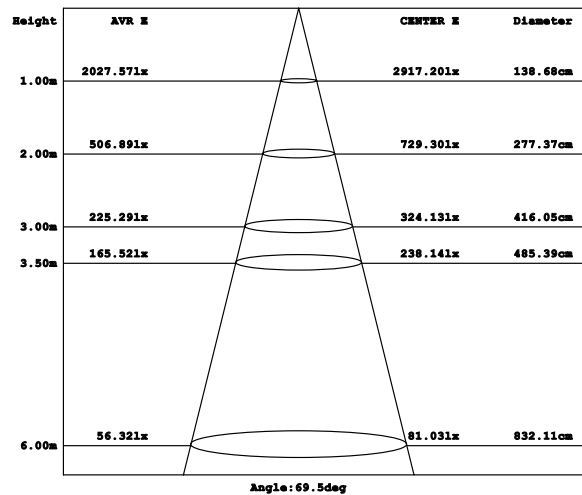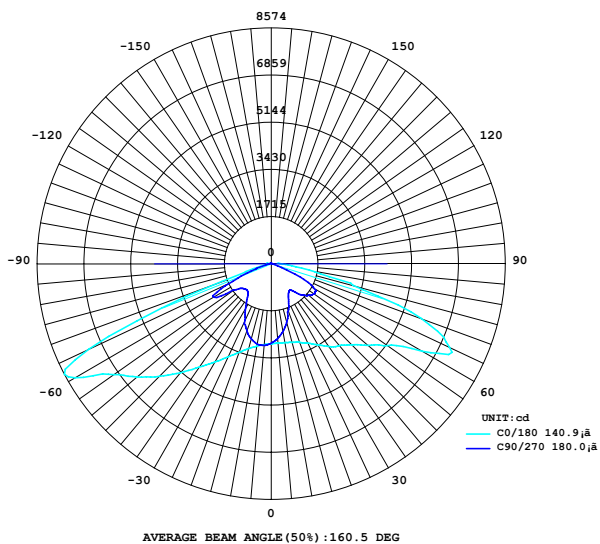

## INSTALLATION INSTRUCTIONS

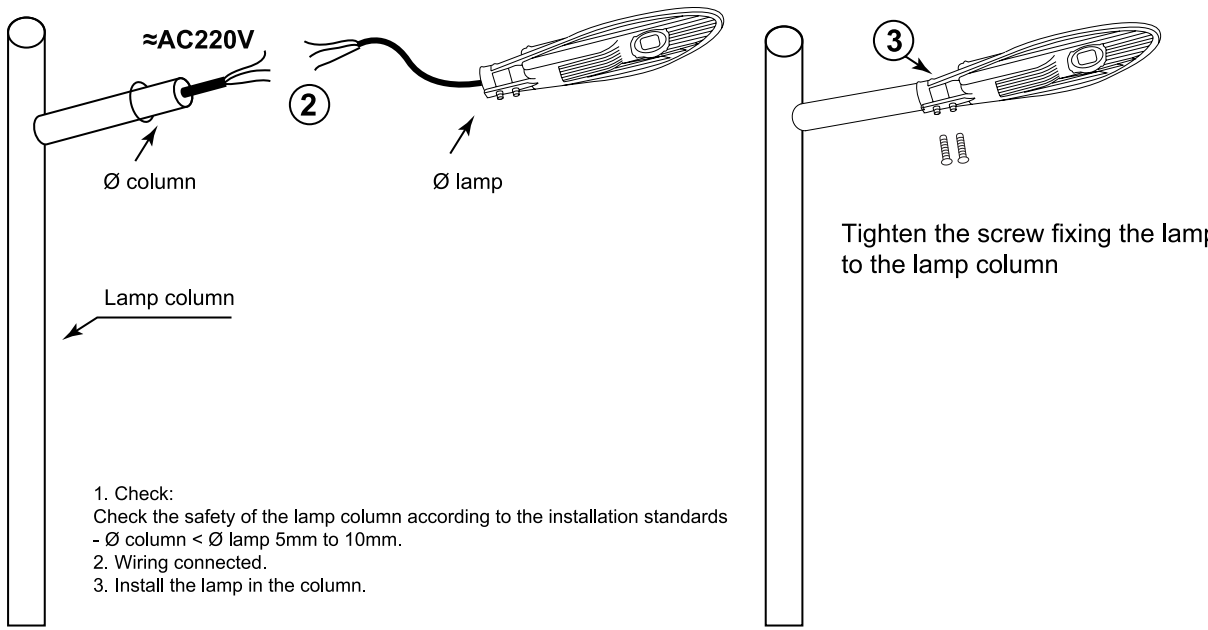

$\approx$ AC220V

Ø column

Ø lamp

Lamp column

2

3

Tighten the screw fixing the lamp to the lamp column

1. Check:  
Check the safety of the lamp column according to the installation standards  
- Ø column < Ø lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.

**Note:** - Disconnect the power supply before connecting the power  
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

## PACKING

Power	Package size	Quantity/Cartons	Carton size
120W	L770xW330xH130mm	1	-

