


ST-AG30



RoHS



SPECIFICATION

Model Code	ST-AG30
Power	30W
Efficiency	125lm/w (4000K)
Input Voltage	85-265VAC
Size	400x170x51mm
Weight	1.3Kg
Body Color	White Grey
LED Source	Bridgelux (USA)
CRI	Ra>70
Beam Angle	135x75°
CCT	3000K/ 4000K/ 6000K
Lumen	3.700lm (W), 3.750lm (N/C)
Life time	Min 30.000h
IP	IP66
Installation	≤ Ø40mm

PHOTOMETRIC CURVES

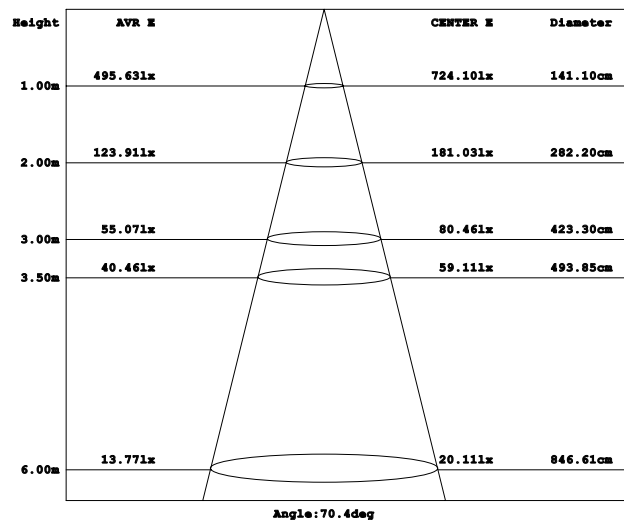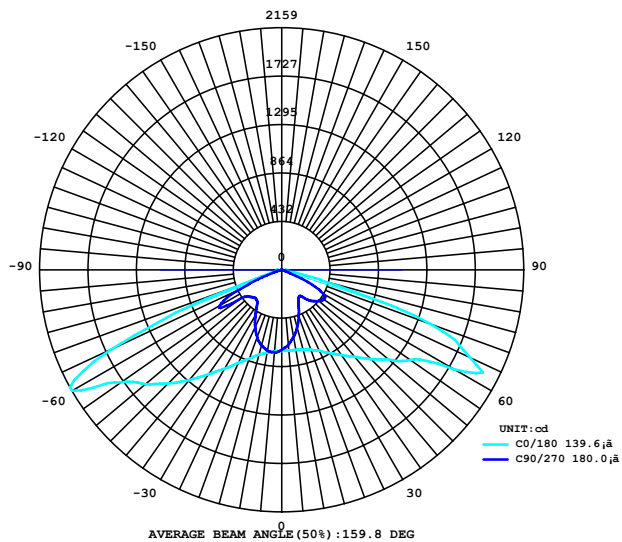

INSTALLATION INSTRUCTIONS

\approx AC220V

2

3

Ø column

Ø lamp

Lamp column

Tighten the screw fixing the lamp to the lamp column

1. Check:
Check the safety of the lamp column according to the installation standards
- Ø column < Ø lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.

Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
30W	L410xW180xH90mm	6	L620xW470xH240mm

