


ST-AG80









| SPECIFICATION | |
|---------------|---------------------------|
| Model Code | ST-AG80 |
| Power | 80W |
| Efficiency | 125lm/W (4000K) |
| Input Voltage | 85-265VAC |
| Size | 606x255x73mm |
| Weight | 3.5Kg |
| Body Color | White Grey |
| LED Source | Bridgelux (USA) |
| CRI | Ra>70 |
| Beam Angle | 135x75° |
| CCT | 3000K/ 4000K/ 6000K |
| Lumen | 9.900lm(W), 10.000lm(N/C) |
| Life time | Min 50.000h |
| IP | IP66 |
| Installation | ≤ Ø60mm |

PHOTOMETRIC CURVES

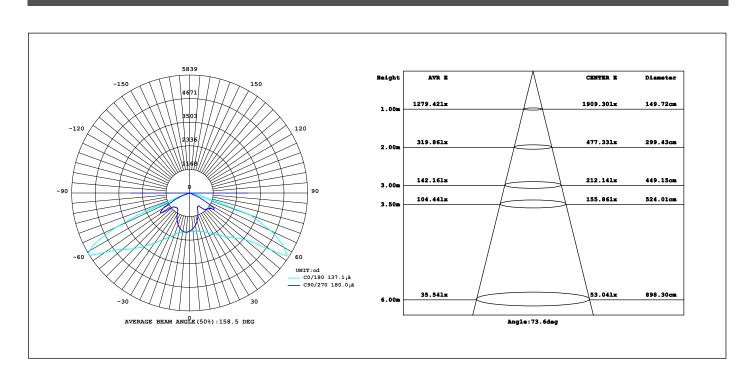

INSTALLATION INSTRUCTIONS

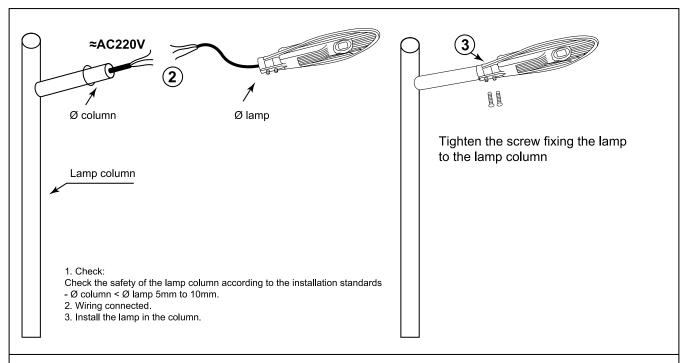

Note: - Disconnect the power supply before connecting the power - Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

