


ST-BG120



RoHS

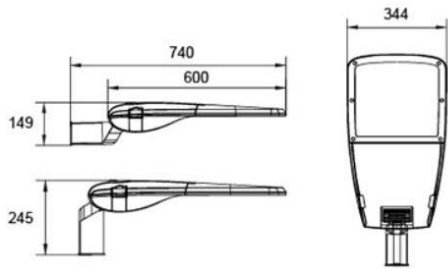

SPECIFICATION

Model Code	ST-BG120
Power	120W
Efficiency	120lm/W (4000K)
Input Voltage	100-240VAC
Size	740x344x149mm
Weight	8.5Kg
Body Color	Dark Grey
LED Source	Lumileds (USA)
CRI	Ra>80
Beam Angle	Type II, Type III
CCT	3000K/ 4000K/ 5700K
Lumen	13.300lm(W), 14.400lm(N/C)
Life time	Min 50.000h
IP/ IK	IP66/ IK08
Installation	≤ Ø60mm

PHOTOMETRIC CURVES

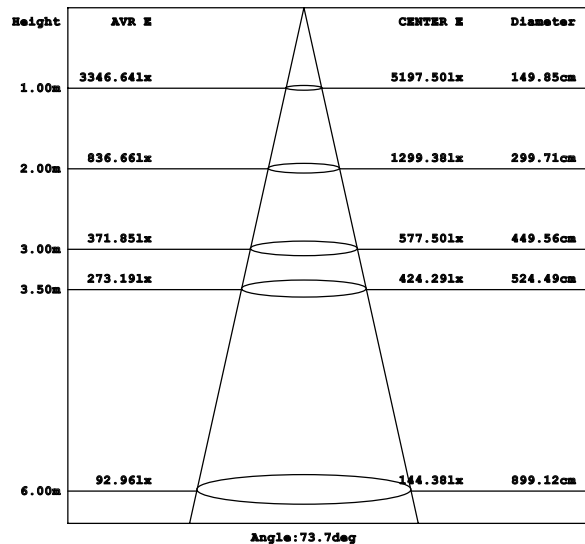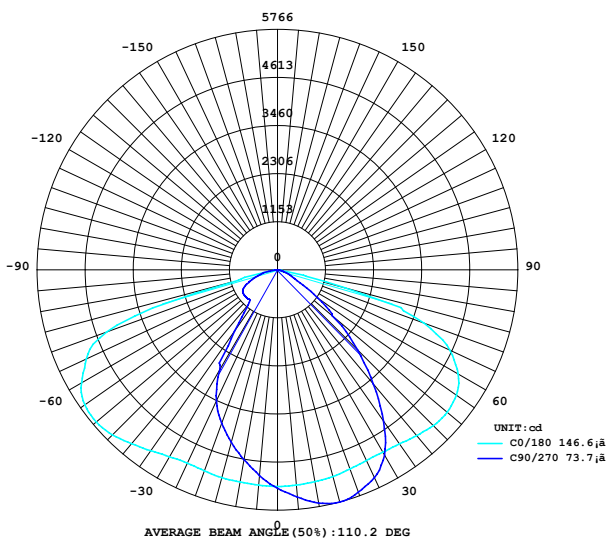

INSTALLATION INSTRUCTIONS

$\approx AC220V$
 \varnothing column \varnothing lamp
 Lamp column

3
 Tighten the screw fixing the lamp to the lamp column
 4

1. Check:
Check the safety of the lamp column according to the installation standards
- \varnothing column $<$ \varnothing lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.
4. Adjust the angle of the lamp accordingly.

Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
120W	L650xW400xH200mm	1	-

