


## ST-HG120



RoHS



### SPECIFICATION

Model Code	ST-HG120
Power	120W
Efficiency	135lm/W (4000K)
Input Voltage	100-240VAC
Size	613x240x109mm
Weight	4.9Kg
Body Color	White Grey
LED Source	Lumileds (USA)
CRI	Ra>80
Beam Angle	Type II, Type III
CCT	3000K/ 4000K/ 5700K
Lumen	15.385lm(W), 16.200lm(N/C)
Life time	Min 50.000h
IP/ IK	IP66/ IK08
Installation	≤ Ø60mm

### PHOTOMETRIC CURVES Beam Angle Type II

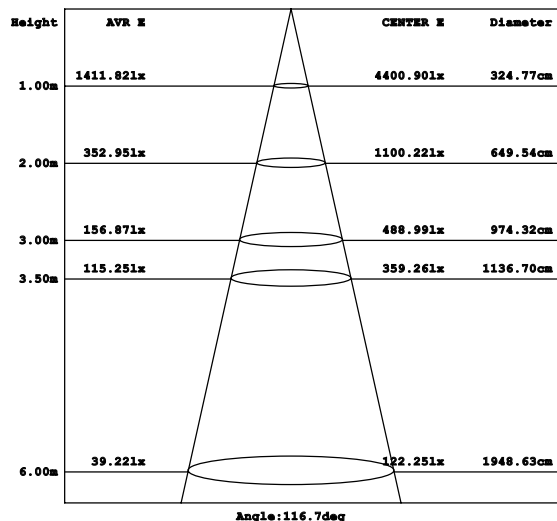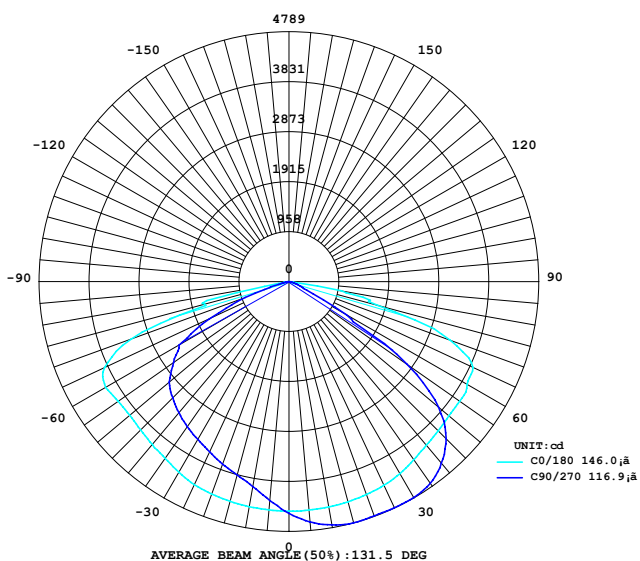

## INSTALLATION INSTRUCTIONS

≈AC220V

Ø column

Ø lamp

Lamp column

1. Check:  
Check the safety of the lamp column according to the installation standards  
- Ø column < Ø lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.
4. Adjust the angle of the lamp accordingly.

Tighten the screw fixing the lamp to the lamp column

**Note:** - Disconnect the power supply before connecting the power  
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

## PACKING

Power	Package size	Quantity/Cartons	Carton size
120W	L666xW295xH152mm	1	-

