


ST-HG150



RoHS



SPECIFICATION

Model Code	ST-HG150
Power	150W
Efficiency	130lm/w (4000K)
Input Voltage	100-240VAC
Size	683x260x109mm
Weight	5Kg
Body Color	White Grey
LED Source	Lumileds (USA)
CRI	Ra>80
Beam Angle	Type II, Type III
CCT	3000K/ 4000K/ 5700K
Lumen	18.750lm(W), 19.500lm(N/C)
Life time	Min 50.000h
IP/ IK	IP66/ IK08
Installation	≤ Ø60mm

PHOTOMETRIC CURVES Beam Angle Type II

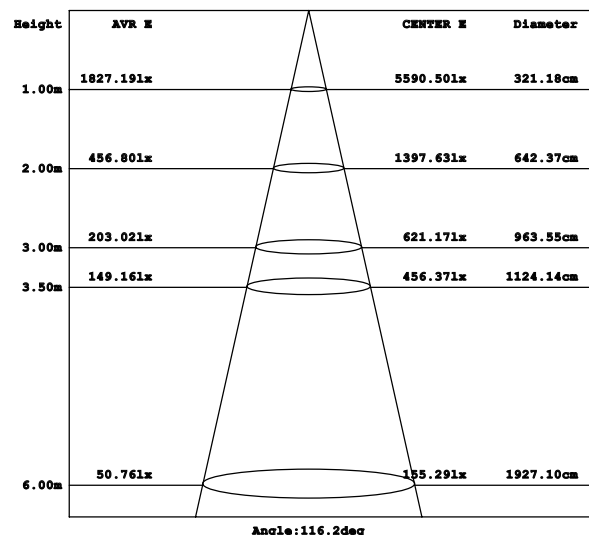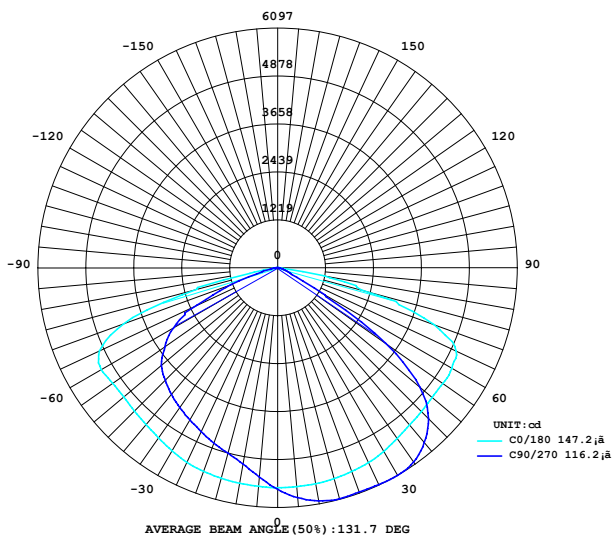

INSTALLATION INSTRUCTIONS

$\approx AC220V$

(2)

Ø column Ø lamp

Lamp column

1. Check:
Check the safety of the lamp column according to the installation standards
- Ø column < Ø lamp 5mm to 10mm.

2. Wiring connected.

3. Install the lamp in the column.

4. Adjust the angle of the lamp accordingly.

(3)

(4)

Tighten the screw fixing the lamp to the lamp column

Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
150W	L736xW315xH150mm	1	-

