# VinaLED®
Sáng tỏa trọn niềm tin

ST-HG80

RoHS CE

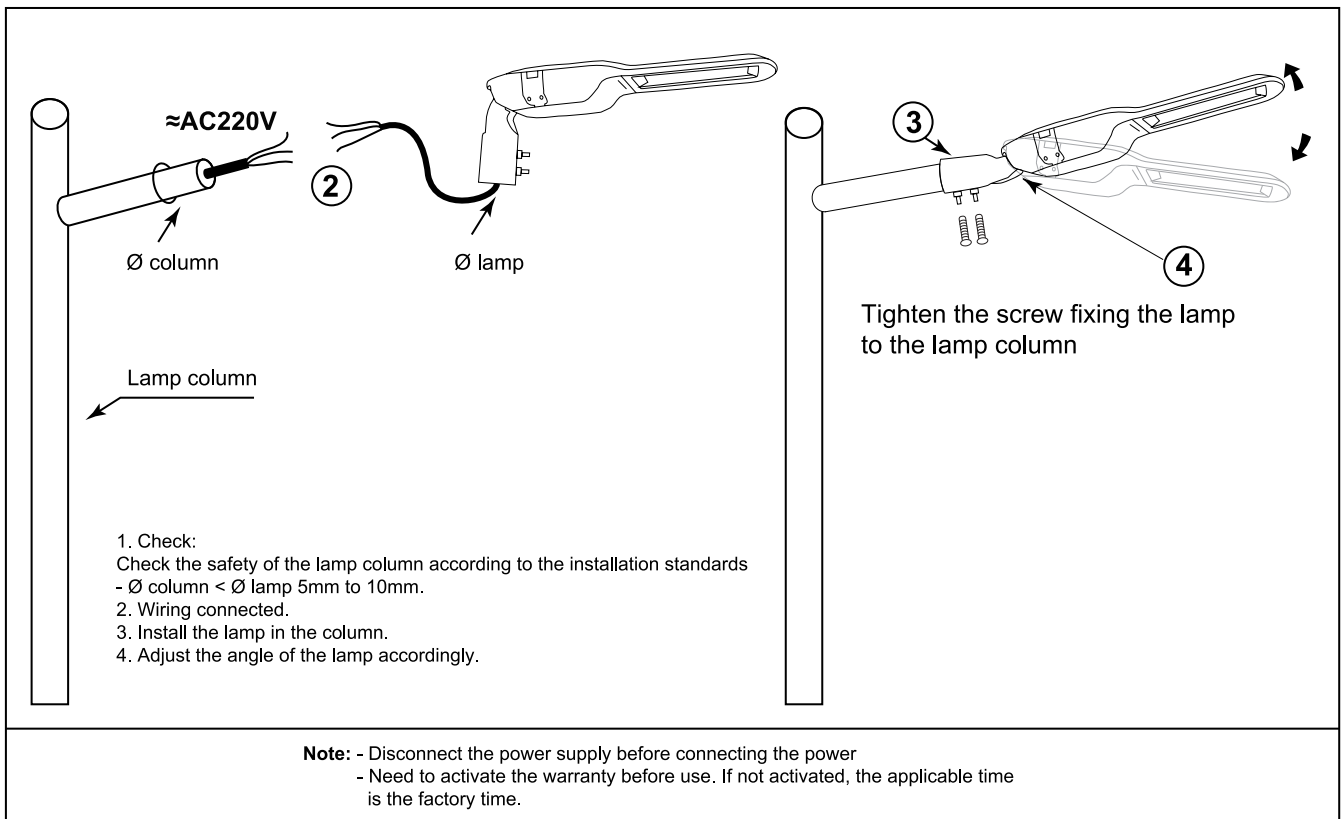
SPECIFICATION

Model Code	ST-HG80
Power	80W
Efficiency	135lm/w (4000K)
Input Voltage	100-240VAC
Size	613x240x109mm
Weight	4.4Kg
Body Color	White Grey
LED Source	Lumileds (USA)
CRI	80
Beam Angle	Type II, Type III
CCT	3000K/ 4000K/ 5700K
Lumen	10.250lm(W), 10.800lm(N/C)
Life time	Min 50.000h
IP/ IK	IP66/ IK08
Installation	≤ Ø60mm

240   109

613

PHOTOMETRIC CURVES Beam Angle Type II

UNIT:cd
C0/180 145.7¡ã
C90/270 114.4¡ã

AVERAGE BEAM ANGLE(50%):130.0 DEG

Height	AVR E		CENTER E	Diameter
1.00m	1063.591x		3120.101x	310.10cm
2.00m	265.901x		780.031x	620.19cm
3.00m	118.181x		346.681x	930.29cm
3.50m	86.821x		254.701x	1085.34cm
6.00m	29.541x		86.671x	1860.58cm

Angle:114.4deg
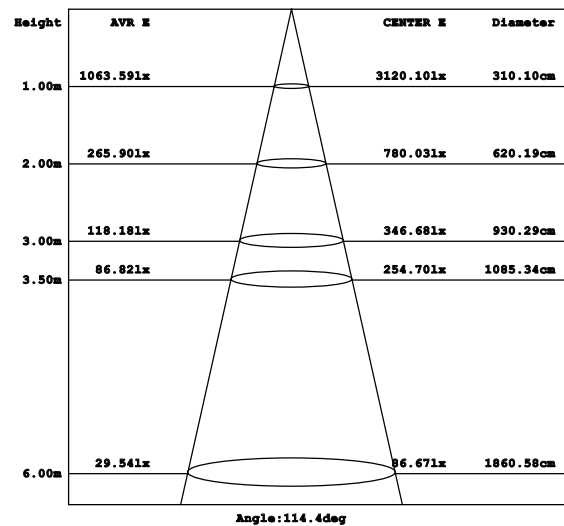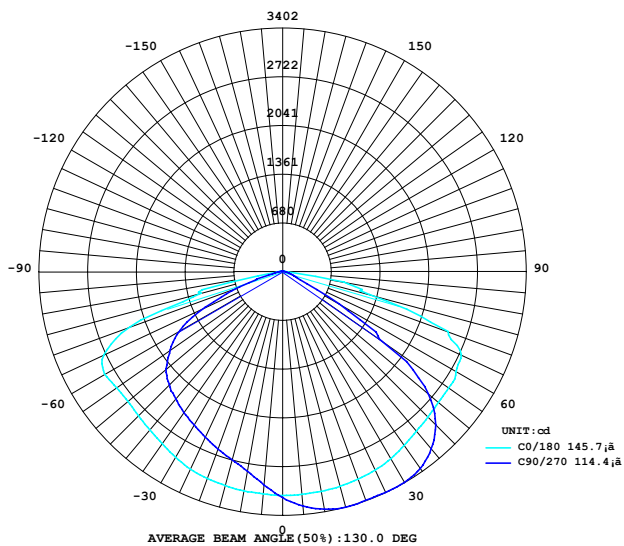
INSTALLATION INSTRUCTIONS

≈AC220V

② Ø column   Ø lamp

Lamp column

③ ④

Tighten the screw fixing the lamp
to the lamp column

1. Check:
Check the safety of the lamp column according to the installation standards
- Ø column < Ø lamp 5mm to 10mm.
2. Wiring connected.
3. Install the lamp in the column.
4. Adjust the angle of the lamp accordingly.

Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time
is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
80W	L666xW295xH150mm	1	-

VinaLED
Sáng tỏa trọn niềm tin

H

L   W