


TL-C22S

T8 Tube

RoHS





SPECIFICATION

Model Code	TL-C22S
Power	22W
Efficiency	110lm/w (4000K)
Input Voltage	100-240VAC
Size	L1198xD29mm
Body Color	White
LED Source	Bridgelux (USA)
CRI	80
Beam Angle	120°
CCT	3000K/ 4000K/ 6500K
Lumen	2370lm(W), 2420lm(N/C)
Life time	Min 30.000h
IP	IP40

Trough accessories are not included

PHOTOMETRIC CURVES

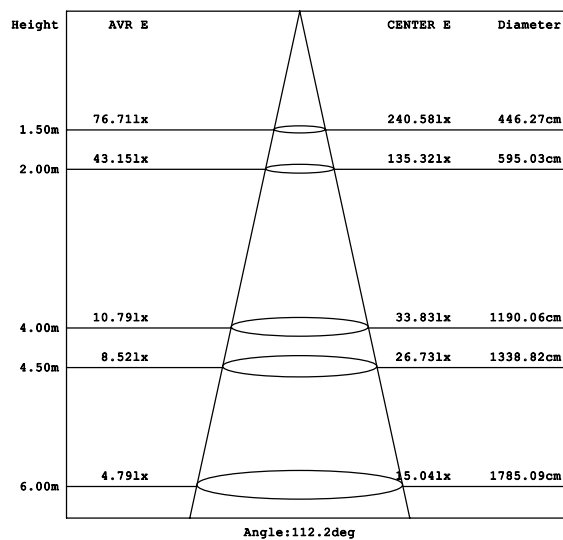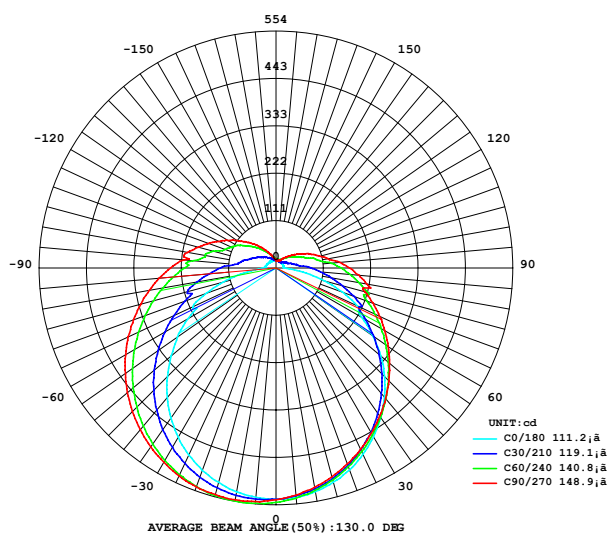


INSTALLATION INSTRUCTIONS

1. Re-wiring with Magnetic Ballast:


The Starter must be removed.

ATTENTION: Only suitable for fixture with magnetic ballast, not electronic ballast.

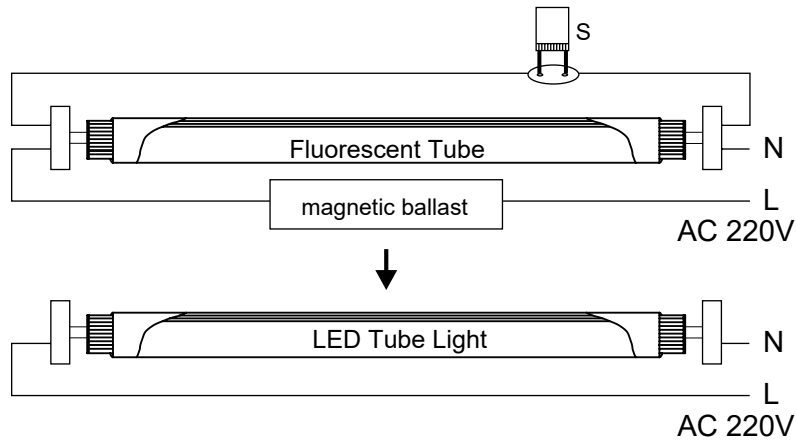

2. Re-wiring with Electronic Ballast:

Electronic ballast must be by-passed by qualified electrician

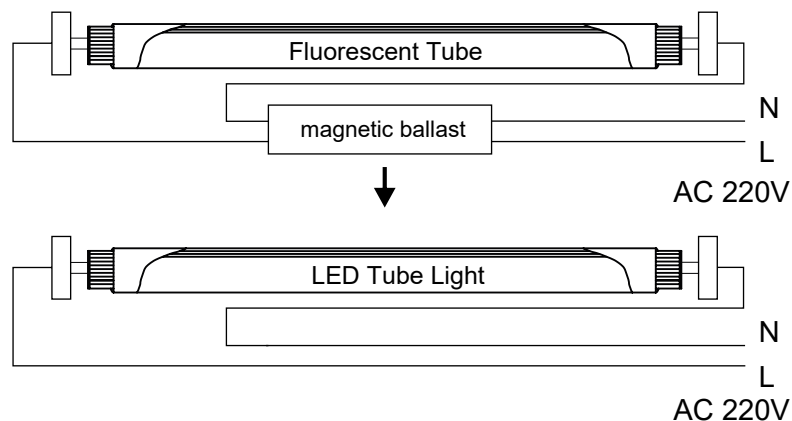

Note: - Disconnect the power supply before connecting the power
 - All heat sinks do not come in direct contact with steel or iron
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
22W	L1200xW36xH36mm	30	L1240xW230xH195mm

