


### TR-FW20/ TR-FB20



RoHS

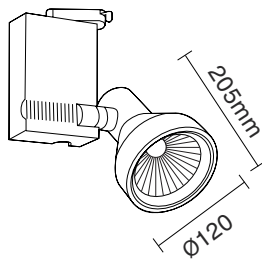

### SPECIFICATION


Model Code	TR-FW20/ TR-FB20
Power	20W
Efficiency	105lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø120xL205mm
Body Color	White/Black
LED Source	CREE (USA)
CRI	Ra>80/90*
Beam Angle	36°
CCT	2700K/ 3000K/ 4000K/ 5000K
Lumen	1980lm(Vàng), 2100lm(N/C)
Life time	Min 30.000h
IP	IP20

### PHOTOMETRIC CURVES

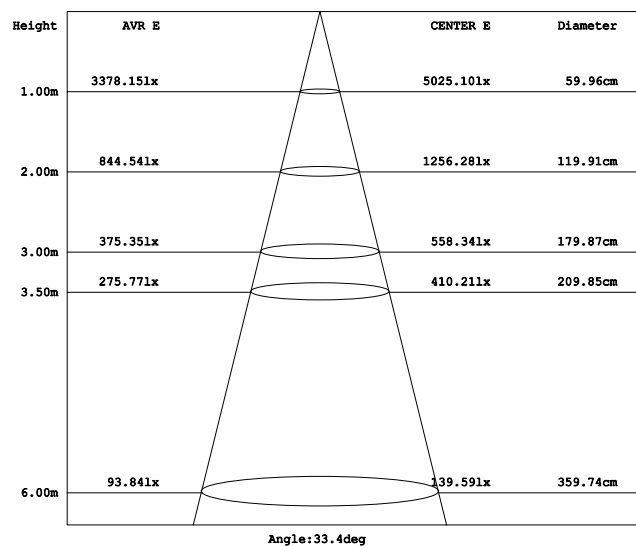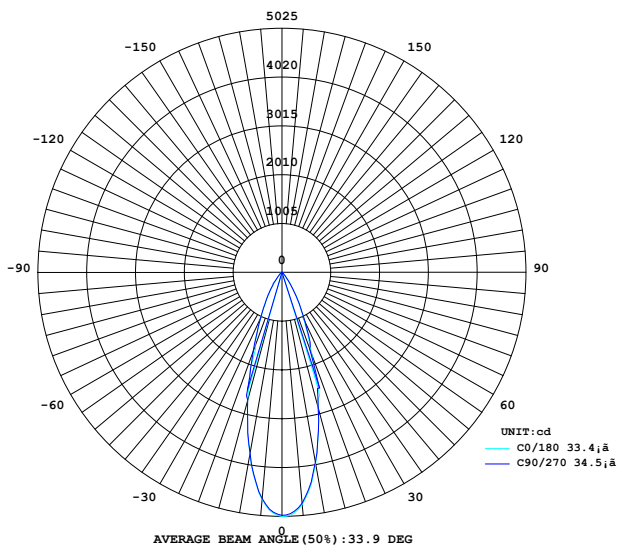


## INSTALLATION INSTRUCTIONS


### 1. Install light to the rail

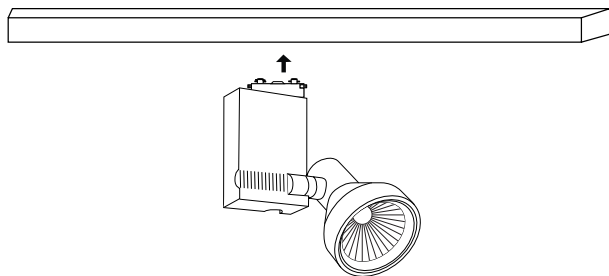


### 2. Turn the button to lock

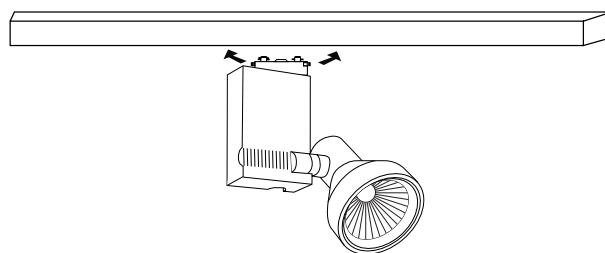

### 3. Adjust the projection direction

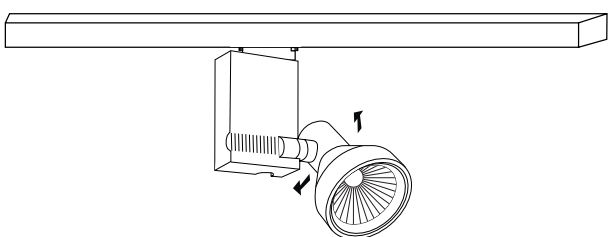

### 4. Finish

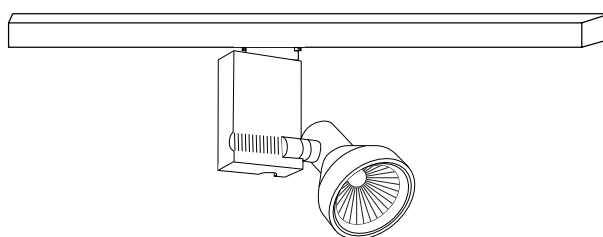

Note: • Disconnect the power supply before connecting the power  
• Need to activate the warranty before use. If not activated, the applicable time is the factory time

## PACKING

Power	Package size	Quantity/Cartons	Carton size
20W	L210xW210xH120mm	10	L620xW470xH250mm

