


TR-KW20/TR-KB20



RoHS



SPECIFICATION


Model Code	TR-KW20/ TR-KB20
Power	20W
Efficiency	85lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø75xL165mm
Body Color	White/Black
LED Source	CREE (USA)
CRI	80/90
Beam Angle	Zoom 18° - 60°
CCT	2700K/ 3000K/ 4000K/ 5000K
Lumen	1605lm(W), 1700lm(N/C)
Life time	Min 30.000h
IP	IP20

PHOTOMETRIC CURVES

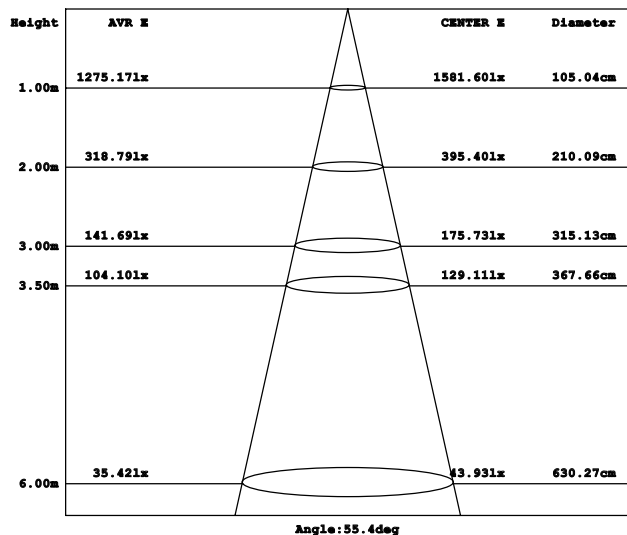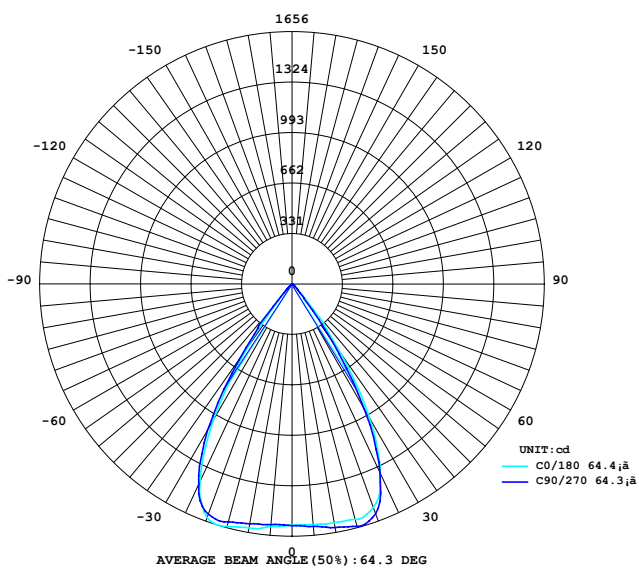


INSTALLATION INSTRUCTIONS


1. Install light to the rail

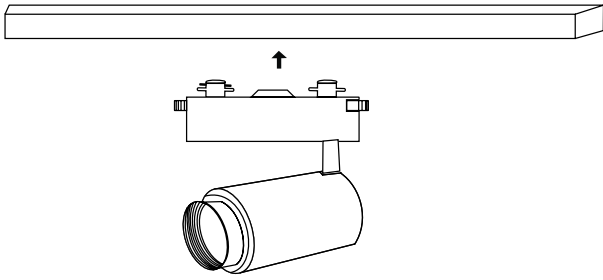


2. Turn the button to lock

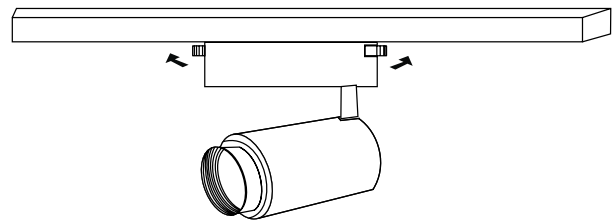

3. Adjust the projection direction

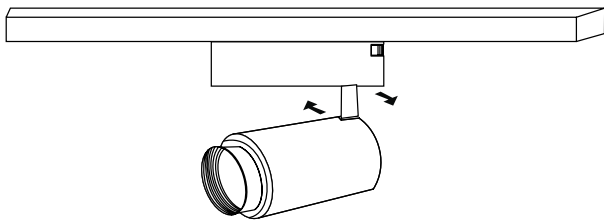

4. Finish

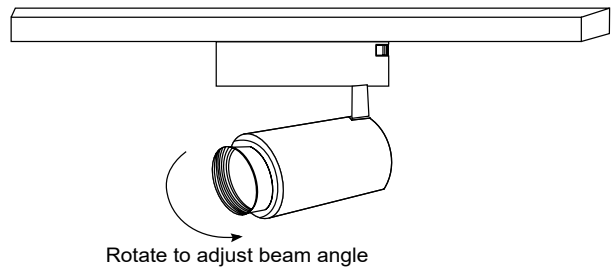

Rotate to adjust beam angle

- Note:
- Disconnect the power supply before connecting the power
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time

PACKING

Power	Package size	Quantity/Cartons	Carton size
20W	L175xW175xH100mm	18	L540xW360xH310mm

