


### TR-LW12/ TR-LB12



RoHS



### SPECIFICATION


Model Code	TR-LW12/ TR-LB12
Power	12W
Efficiency	85lm/W (4000K)
Input Voltage	220-240VAC
Size	Ø90xL140mm
Body Color	White/Black
LED Source	CREE (USA)
CRI	Ra>80/90*
Beam Angle	zoom 15° - 60°
CCT	2700K/ 3000K/ 4000K/ 5000K
Lumen	1000lm(W), 1080lm(N/C)
Life time	Min 30.000h
IP	IP20

### PHOTOMETRIC CURVES

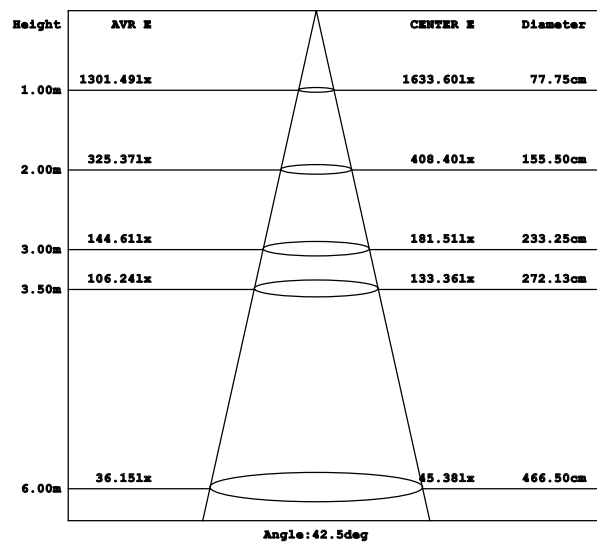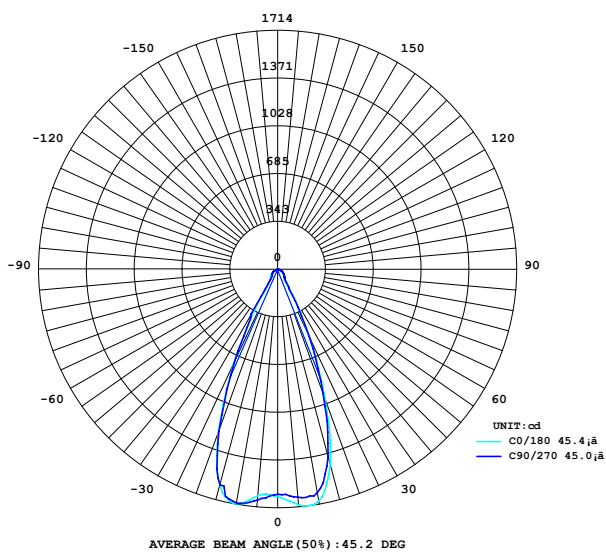


## INSTALLATION INSTRUCTIONS


### 1. Install light to the rail

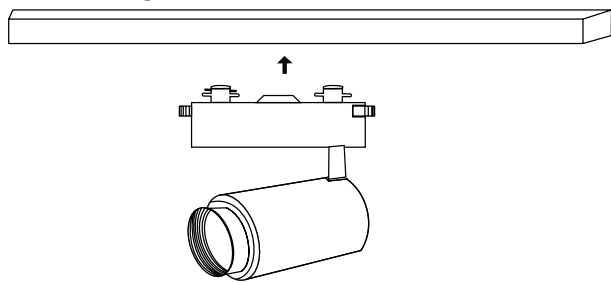


### 2. Turn the button to lock

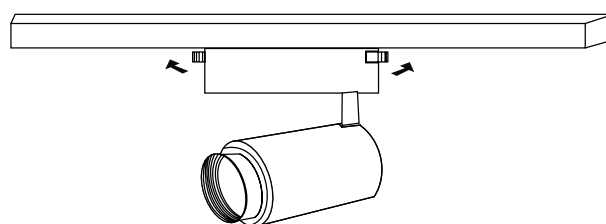

### 3. Adjust the projection direction

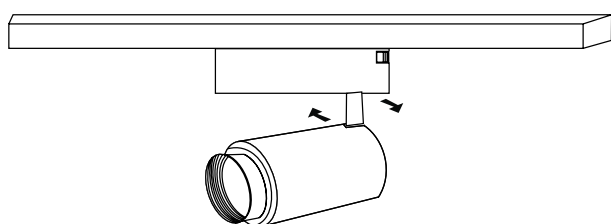

### 4. Finish

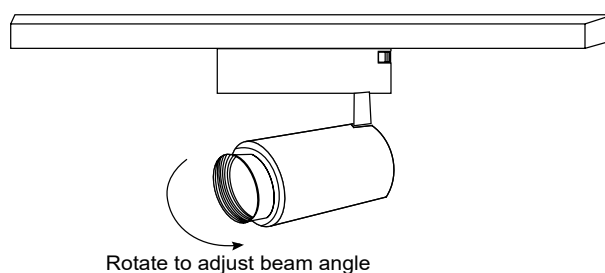

Rotate to adjust beam angle

- Note:
- Disconnect the power supply before connecting the power
  - Need to activate the warranty before use. If not activated, the applicable time is the factory time

## PACKING

Power	Package size	Quantity/Cartons	Carton size
12W	L175xW175xH100mm	18	L540xW360xH310mm

