


UF-AS12



RoHS




## SPECIFICATION

Model Code	UF-AS12
Power	12W
Efficiency	90lm/W (4000K)
Input Voltage	24VDC(0.62A)
Size	Ø180xH80mm
Hole size	Ø42mm
Body Color	Silver
LED Source	LUMILEDS (USA)
CRI	Ra>80
Beam Angle	5°/10°/15°/30°/45°
CCT	2700K/3000K/4000K/5700K/Color
Lumen	1010lm(W), 1080lm(N/C)
Life time	Min 30.000h
IP	IP68

## PHOTOMETRIC CURVES Beam Angle 30°

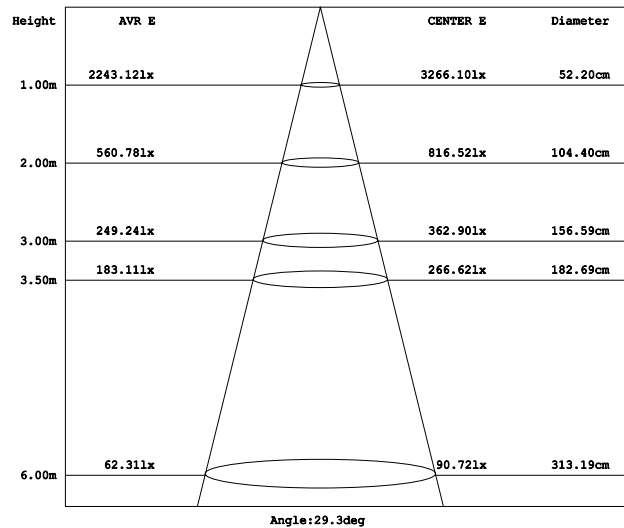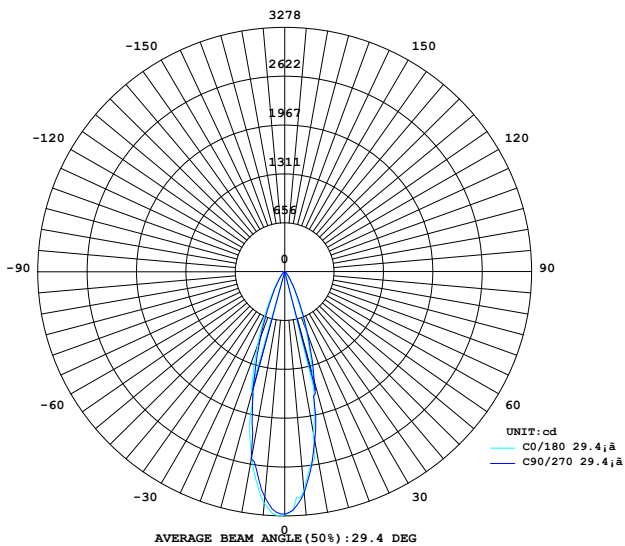


## INSTALLATION INSTRUCTIONS



Hole size

Connector IP68

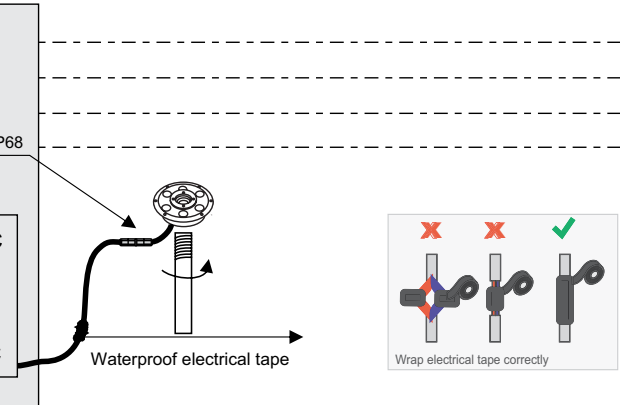

Waterproof electrical tape

Wrap electrical tape correctly

Deep water ≤1m


Connected with power supply DC  
Brown wire (V+)  
Blue wire (V-)

Connected with power supply AC

*Note:*


- Turn off power, check system safety before construction
- Use waterproof electrical tape in connect to wir
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

**X** Installation without connector IP68 or waterproof junction box leads to moisture and water following the electrical wires into the lamp

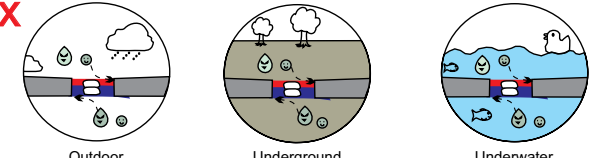

Outdoor      Underground      Underwater


**✓** Installation with connector IP68 or waterproof junction box moisture and water will not follow the electrical wires into the lamp

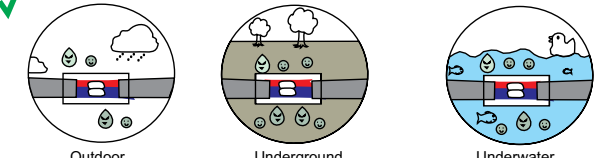


Outdoor      Underground      Underwater


## PACKING

Power	Package size	Quantity/Cartons	Carton size
12W	L210xW210xH100mm	12	L620xW470xH250mm





VinaLED®  
Sáng tỏa trọn niềm tin

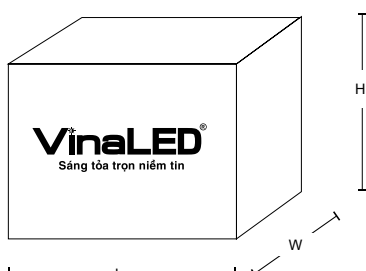

VinaLED®  
Sáng tỏa trọn niềm tin