


UF-AS6



RoHS




## SPECIFICATION

Model Code	UF-AS6
Power	6W
Efficiency	85lm/W (4000K)
Input Voltage	24VDC(0.35A)
Size	Ø150xH74mm
Hole size	Ø26mm
Body Color	Silver
LED Source	LUMILEDS (USA)
CRI	Ra>80
Beam Angle	5°/10°/15°/30°/45°
CCT	2700K/3000K/4000K/5700K/Color
Lumen	475lm(W), 510lm(N/C)
Life time	Min 30.000h
IP	IP68

## PHOTOMETRIC CURVES Beam Angle 30°

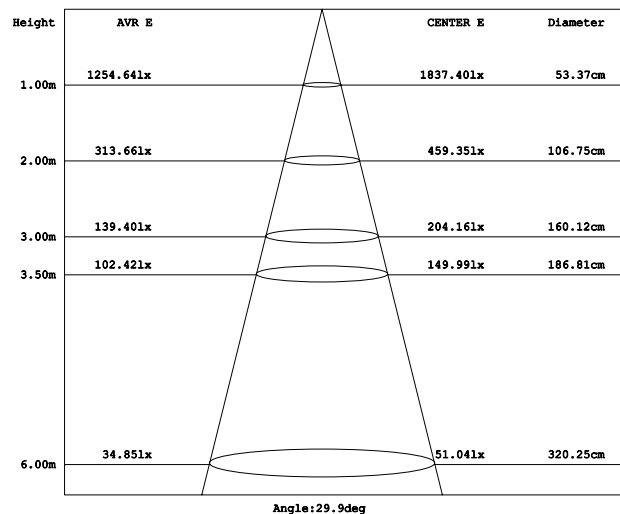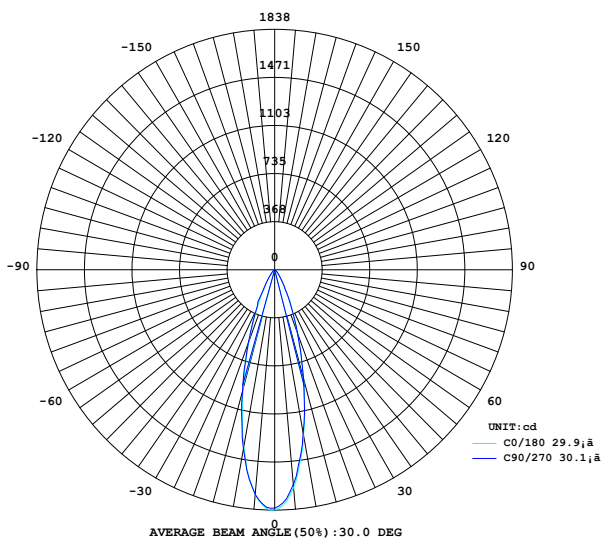


## INSTALLATION INSTRUCTIONS




Connected with power supply DC  
Brown wire (V+)  
Blue wire (V-)

Connected with power supply AC

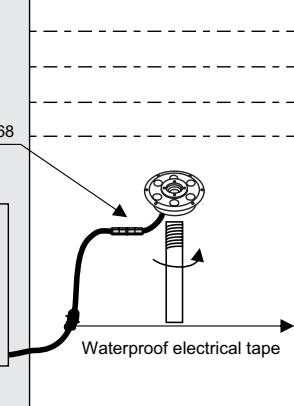

Deep water ≤1m






Wrap electrical tape correctly

**Note:**




- Turn off power, check system safety before construction
- Use waterproof electrical tape in connect to wir
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

**X** Installation without connector IP68 or waterproof junction box leads to moisture and water following the electrical wires into the lamp

Outdoor      Underground      Underwater

**✓** Installation with connector IP68 or waterproof junction box moisture and water will not follow the electrical wires into the lamp

Outdoor      Underground      Underwater

## PACKING

Power	Package size	Quantity/Cartons	Carton size
6W	L155xW155xH90mm	20	L480xW330xH320mm

