


UG-DS6



RoHS



SPECIFICATION


Model Code	UG-DS6
Power	6W
Efficiency	60lm/W (4000K)
Input Voltage	DC24V(0.35A)
Size	195x63x65mm
Hole size	180x58mm
Body Color	Silver
LED Source	CREE (USA)
CRI	Ra>80
Beam Angle	Asymmetric 45° / Symmetrical 45°
CCT	3000K/6500K/Color
Lumen	340lm(W), 360lm(N/C)
Life time	Min 30.000h
IP	IP67

PHOTOMETRIC CURVES

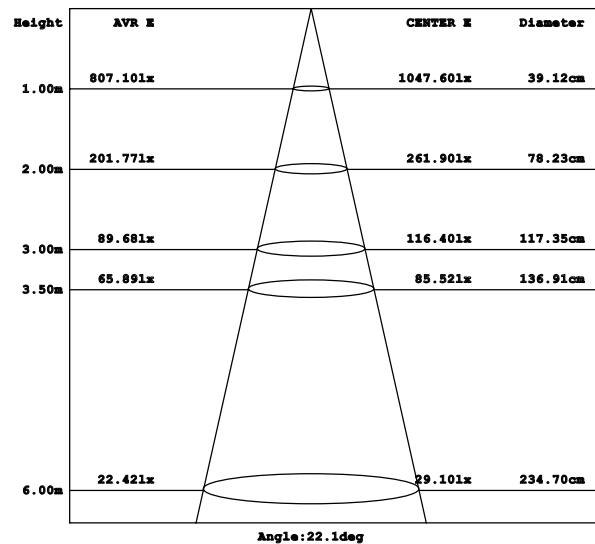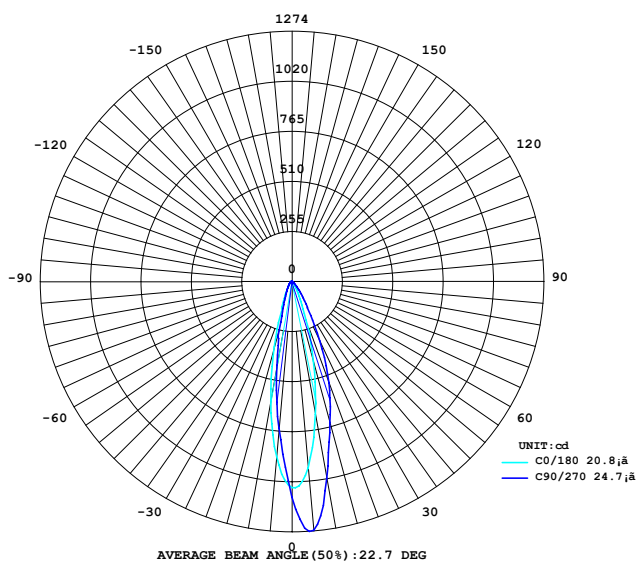


INSTALLATION INSTRUCTIONS



1. Remove the lamp body and cover





2. Drill holes, pour 1 layer of gravel $\geq 30\text{cm}$, fix cover

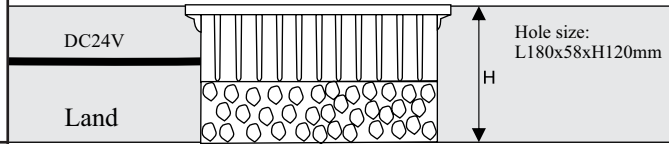




3. Connect the power lead to mains supply DC24V

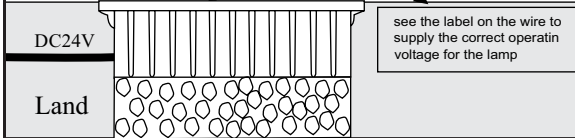

4. Cover the plastic base with silicone, install the lamp on the plastic base, screw the screws to fix the lamp on the plastic base

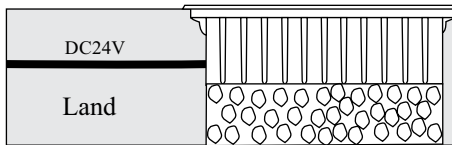

Wrap electrical tape correctly, make sure water can't get inside

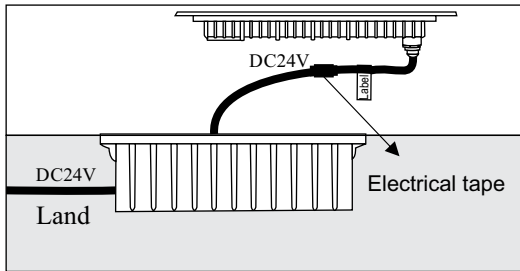

- Note:**
- Disconnect the power supply before connecting the power
 - Housing material is Aluminum, do not install near sea water or high acidity environment
 - Need to activate the warranty before use. If not activated, the applicable time is the factory time.
 - Place a layer of gravel about 30cm to limit rainwater and the risk of groundwater rising

PACKING

Power	Package size	Quantity/Cartons	Carton size
6W	L215xW105xH67mm	49	L620xW470xH250mm

