


UG2S -BS1

RoHS



SPECIFICATION

Model Code	UG2S -BS1
Power	1W
Efficiency	115lm/W (4000K)
Input Voltage	85-265VAC
Size	Ø52mm
Hole size	Ø42mm
Cover size	Ø42xH80mm
Body Color	Silver
LED Source	CREE (USA)
CRI	Ra>80
CCT	2700K/ 3000K/ 4000K/ 5700K/Color
Lumen	40lm(W), 50lm(N/C)
Life time	Min 30.000h
IP	IP67

INSTALLATION INSTRUCTIONS

PACKING

1. Remove the lamp body and cover

2. Drill holes, fix cover

3. Connect the power lead to mains supply

4. Pour 1 layer of gravel ≥30cm, install the lamp on the plastic base

Wrap electrical tape correctly, make sure water can't get inside


Note:

- Disconnect the power supply before connecting the power
- Housing material is Aluminum, do not install near sea water or high acidity environment
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.
- Place a layer of gravel about 30cm to limit rainwater and the risk of groundwater rising


Power	1W
Package size	L105xW105xH75mm
Quantity/Cartons	50
Carton size	L480xW330xH320mm

INSTALLATION INSTRUCTIONS


1. Remove the lamp body and cover

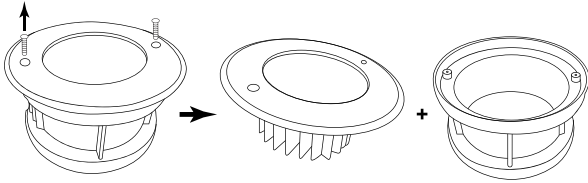


2. Drill holes, fix cover

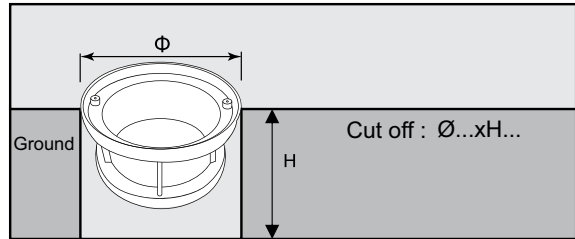




3. Connect the power lead to mains supply

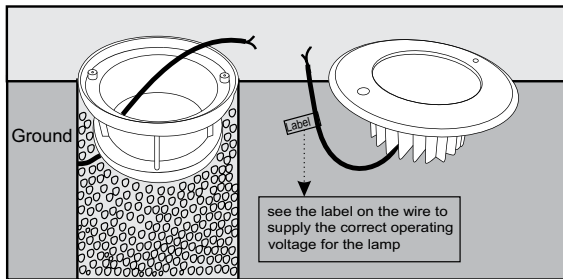

4. Fix the lamp to the cover

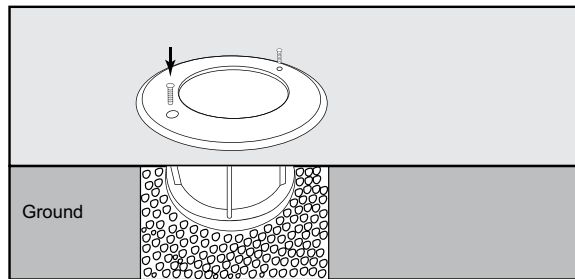

Wrap electrical tape correctly, make sure water can't get inside

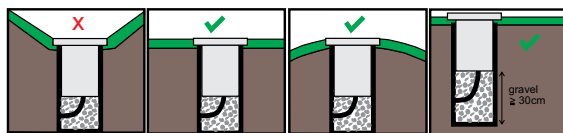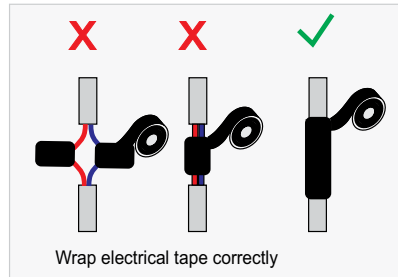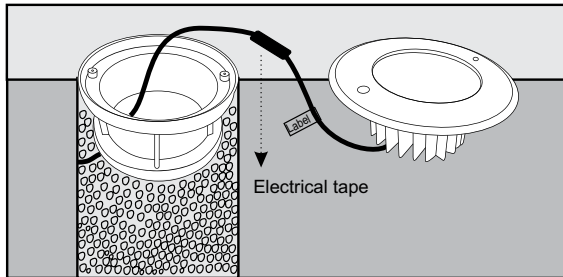

Note:

- Disconnect the power supply before connecting the power
- Housing material is Aluminum, do not install near sea water or high acidity environment.
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
3W	L130xW130xH110mm	20	L560xW270xH270mm

