


UW-CS6



RoHS



SPECIFICATION

Model Code	UW-CS6
Power	6W
Efficiency	85lm/W (4000K)
Input Voltage	24VDC(0.35A)
Size	Ø120xH75mm
Body Color	Silver
LED Source	CREE (USA)
CRI	Ra>80
Beam Angle	5°/ 10°/ 15°/ 30°/ 45°
CCT	2700K/3000K/4000K/5700K/Color
Lumen	475lm(W), 510lm(N/C)
Life time	Min 30.000h
IP	IP68

PHOTOMETRIC CURVES Beam Angle 30°

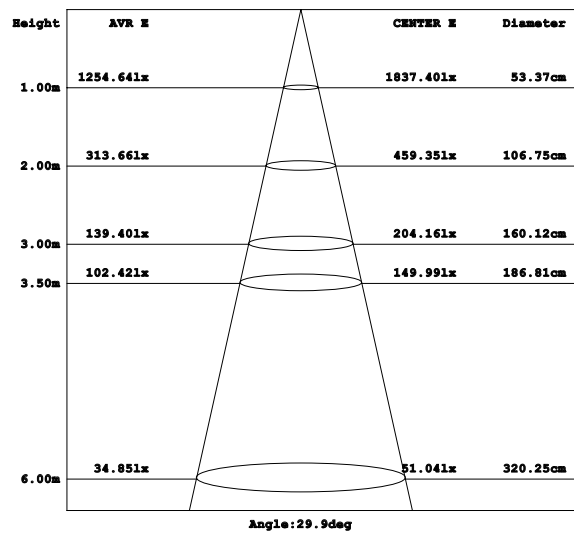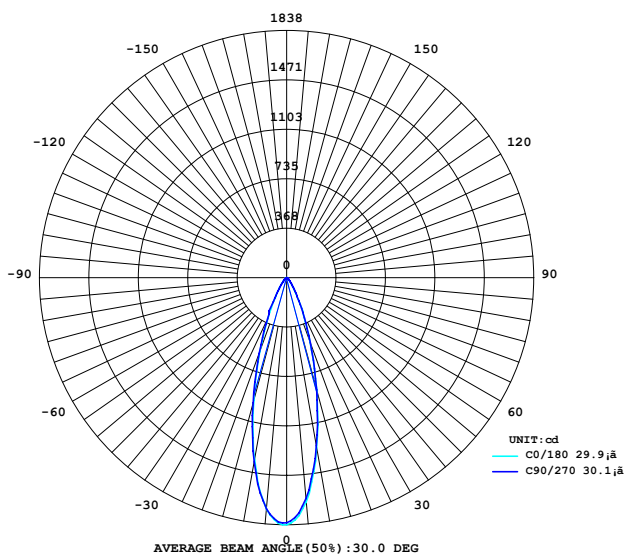

INSTALLATION INSTRUCTIONS

Connector IP68

Connected with power supply DC
Brown wire (V+)
Blue wire (V-)

Connected with power supply AC

Waterproof electrical tape

Wrap electrical tape correctly

Deep water ≤1m

Note:

- Turn off power, check system safety before construction
- Use waterproof electrical tape in connect to wir
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

Installation without connector IP68 or waterproof junction box leads to moisture and water following the electrical wires into the lamp

X

Outdoor Underground Underwater

Installation with connector IP68 or waterproof junction box moisture and water will not follow the electrical wires into the lamp

✓

Outdoor Underground Underwater

PACKING

Power	Package size	Quantity/Cartons	Carton size
6W	L155xW155xH90mm	20	L480xW330xH320mm