VinaLED®

Sáng tỏa trọn niềm tin

WW-AG12

RoHS CE
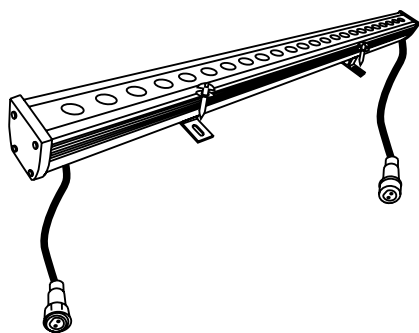

SPECIFICATION

Model Code	WW-AG12
Power	12W
Efficiency	100lm/W (4000K)
Input Voltage	85-265VAC/24VDC(0.62A)
Size	500x50x50mm
Body Color	Silver
LED Source	CREE(USA)
CRI	Ra>80
Beam Angle	5º /10º /15º /30º /45º/ 10x45º/10x80º/20x40º/30x60º
CCT	2700K/3000K/ 4000K/ 5700K
Lumen	1165lm(W), 1200lm(N/C)
Life time	Min 30.000h
IP	IP65

PHOTOMETRIC CURVES Beam Angle 30º

UNIT:cd
— C0/180 19.4¡ã
— C90/270 19.5¡ã

AVERAGE BEAM ANGLE(50%):19.4 DEG

| Height	AVR E		CENTER E	Diameter
1.00m	4900.14lx		6871.70lx	34.21cm
2.00m	1225.04lx		1717.93lx	68.42cm
3.00m	544.46lx		763.52lx	102.63cm
3.50m	400.01lx		560.96lx	119.73cm
6.00m	136.12lx		190.88lx	205.25cm

Angle:19.4deg
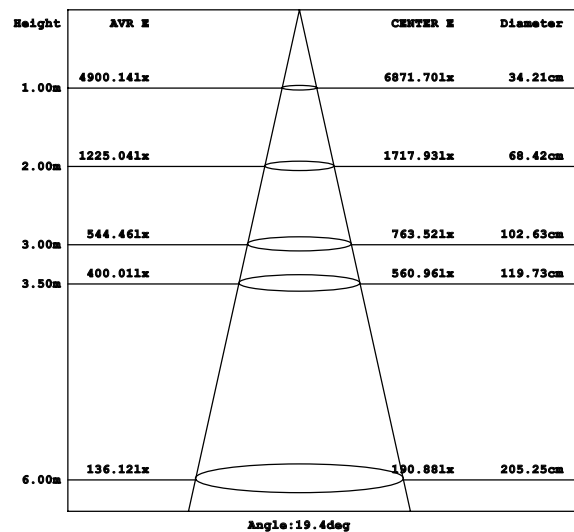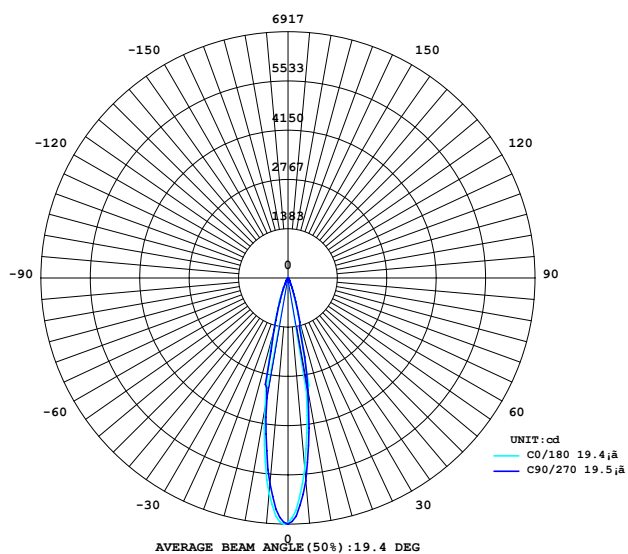
INSTALLATION INSTRUCTIONS

1. Mount the lamp to the fixed bracket

2. Connect the lamp to the lamp
Connect the lamp to the power supply and signal DMX512

Close the cover when using a single lamp or a link lamp in the last position

220VAC
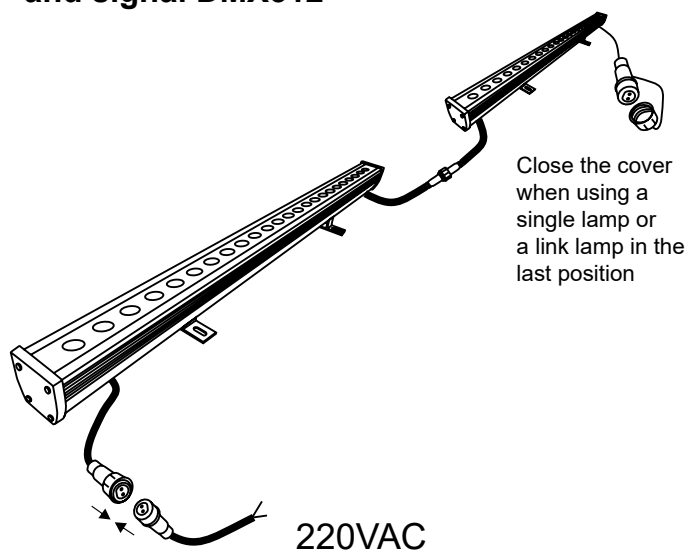
Note: - Disconnect the power supply before connecting the power
- Need to activate the warranty before use. If not activated, the applicable time is the factory time.

PACKING

Power	Package size	Quantity/Cartons	Carton size
12W	L560xW115xH75mm	1	-

VinaLED
Sáng tỏa trọn niềm tin