


## DL-GW20

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-GW20	20W	CITIZEN (Japan)	50°	3000K	>80	2130lm
					>90	1955lm
				4000K	>80	2260lm
					>90	2025lm
				5000K	>80	2260lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

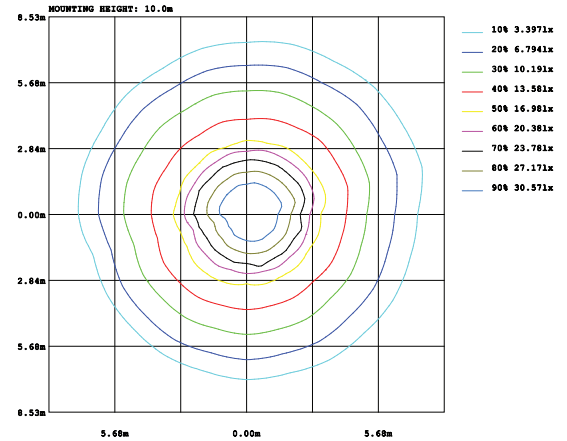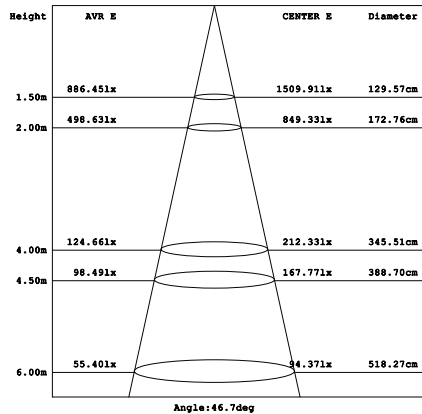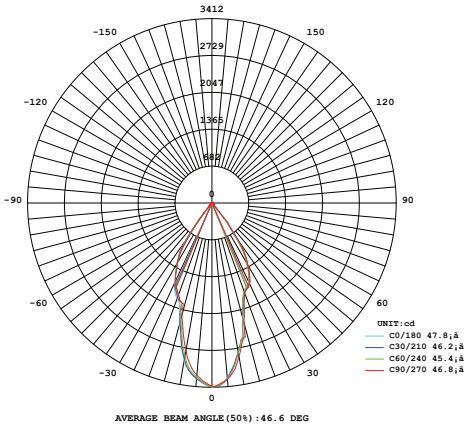

Parameter of DL-GW20 | CCT 4000K

### INSTALLATION INSTRUCTIONS

### PACKING

**1. Ceiling cut**

Size cut: Ø180mm

**3. Connected Led Driver with 220VAC power**  
**4. Connected Led Driver with lamp**

**2. Remove the circle on the front**  
Rotate clockwise and remove

**5. Fix the lamp to the ceiling**  
Use a screwdriver to tighten, fix the lamp to the ceiling

**6. Finish**  
Install the front circle into the lamp  
Rotate counterclockwise

1 pcs  
 100mm  
 210mm  
 210mm  
 8 pcs  
 530mm  
 350mm  
 310mm  
 VinaLED®  
 Dẫn đầu về độ sáng và chất lượng