


DL-AW20

White



120x120mm

3000K 3500K 4000K 5000K 5700K




>30.000 Hours 220-240 VAC RoHS CE

Model	Power	Led source	Led Qty.	Beam angle	CCT	CRI	Flux
DL-AW20	20W	Cree (USA)	9	24°/38°	3000K	>80	2010lm
					4000K	>80	2030lm
					5000K	>80	2030lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

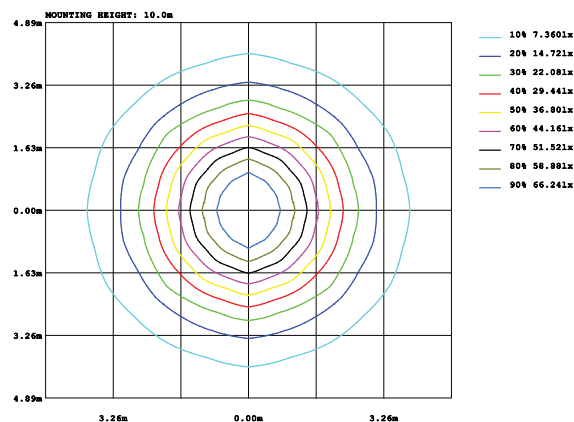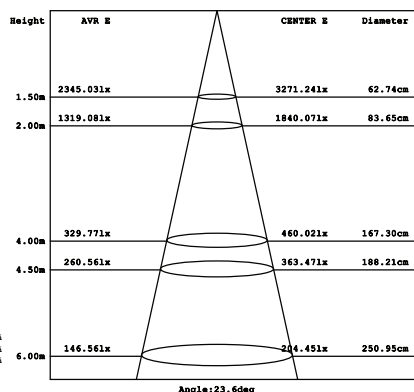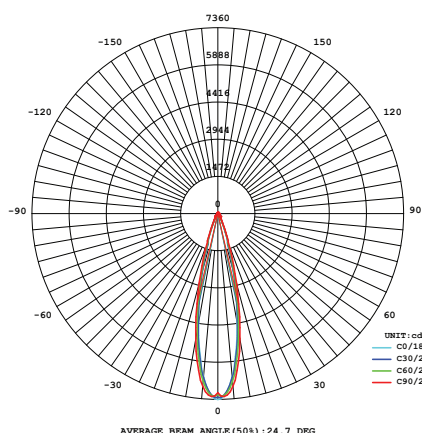

Parameter of DL-AW20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

