


3000K 3500K 4000K 5000K 5700K

>30.000 Hours 220-240 VAC RoHS CE

DL-AW6

White

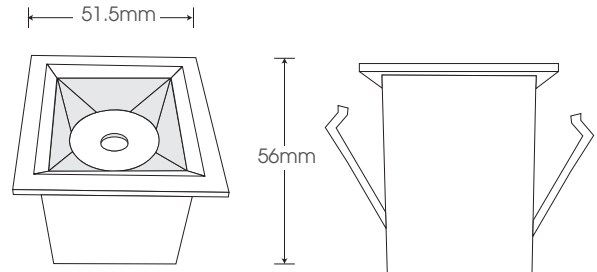


45x45mm

| Model | Power | Led source | Beam angle | CCT | CRI | Flux |
|--------|-------|------------|------------|-------|-----|-------|
| DL-AW6 | 6W | Cree (USA) | 24°/38° | 3000K | >80 | 700lm |
| | | | | 4000K | >80 | 750lm |
| | | | | 5000K | >80 | 750lm |

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

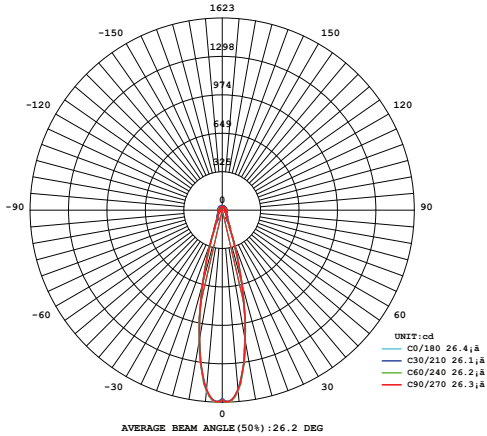

| Height | AVR E | CENTER E | Diameter |
|--------|----------|----------|----------|
| 1.50m | 515.69lx | 709.91lx | 69.11cm |
| 2.00m | 290.07lx | 399.32lx | 92.14cm |
| 4.00m | 72.52lx | 99.83lx | 184.28cm |
| 4.50m | 57.30lx | 78.88lx | 207.32cm |
| 6.00m | 32.23lx | 44.37lx | 276.42cm |

Angle: 25.94deg

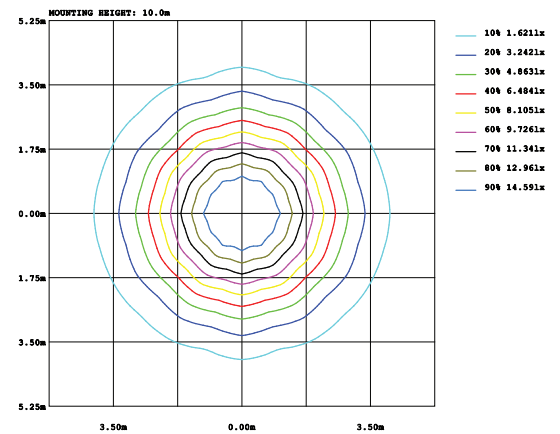

Parameter of DL-AW6 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

