


DL-HW2x10

White




Model	Power	Led source	Led Qty...	Beam angle	CCT	CRI	Flux
DL-HW2x10	20W	EDISON (TAIWAN)/ CITIZEN (Japan)*	2	38°	3000K	>80	1665lm
						>90	1450lm
					4000K	>80	1725lm
						>90	1680lm
					5000K	>80	1725lm
						>90	1680lm


LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

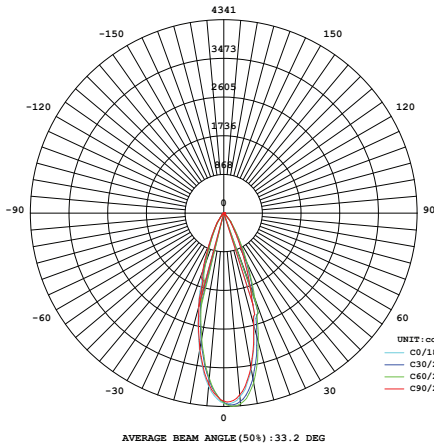

Height	AVR E	CENTER E	Diameter
1.50m	1299.49lx	1896.31lx	88.25cm
2.00m	730.96lx	1066.68lx	117.67cm
4.00m	182.74lx	266.67lx	235.34cm
4.50m	144.39lx	210.70lx	264.76cm
6.00m	81.22lx	110.52lx	353.01cm

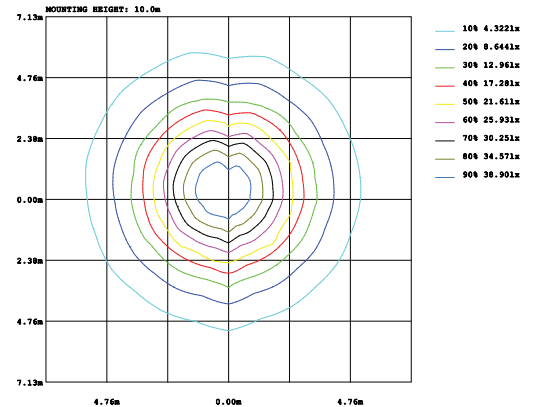

Parameter of DL-HW2x10 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

