


2700K 3000K 3500K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE

DL-HW2x20

White






Model	Power	Led source	Led Qty	Beam angle	CCT	CRI	Flux
DL-HW2x20	40W	CITIZEN (Japan)	2	38°	3000K	>80	3650lm
						>90	3490lm
					4000K	>80	3725lm
						>90	3550lm
					5000K	>80	3725lm
						>90	3550lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

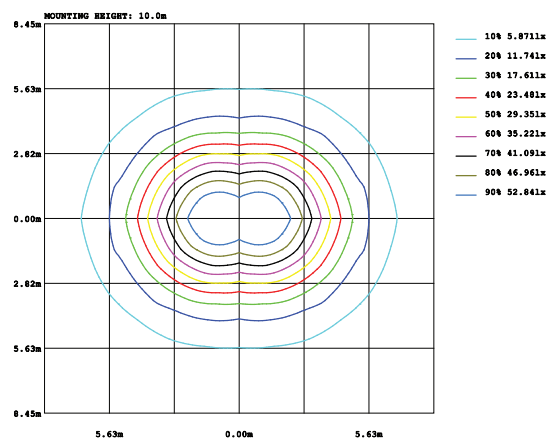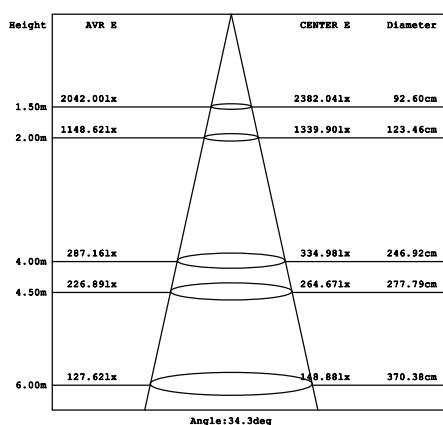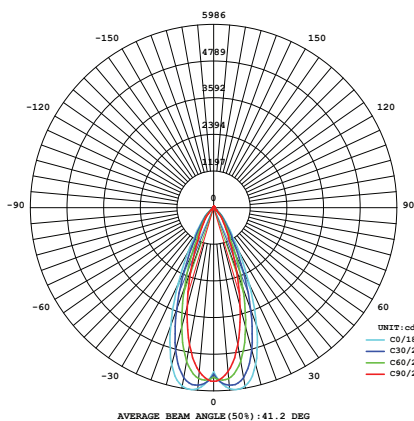

Parameter of DL-HW2x20 | CCT 3000K

INSTALLATION INSTRUCTIONS

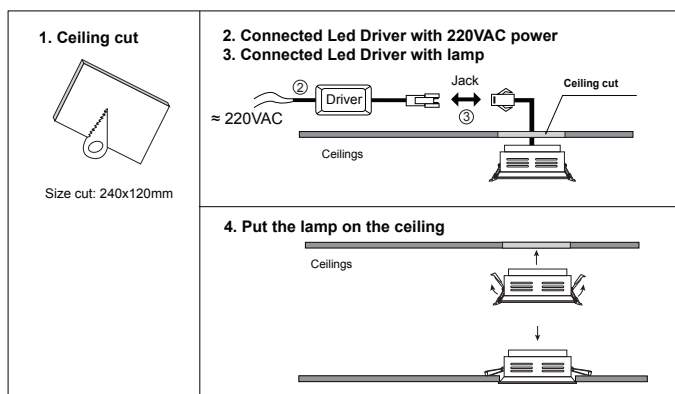

PACKING

