



## FL-EG30



Grey

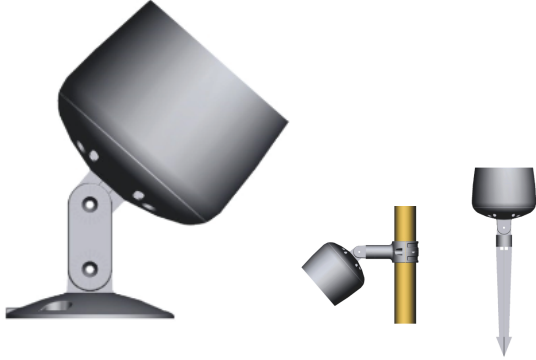


Model	Power	Led source	Beam angle	CRI	CCT	Flux
FL-EG30	30W	CREE (USA)	15°/25°	>80	3000K	2570lm
					4000K	2610lm
					5000K	2610lm

### LAMP PHOTOMETRIC REPORT


### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

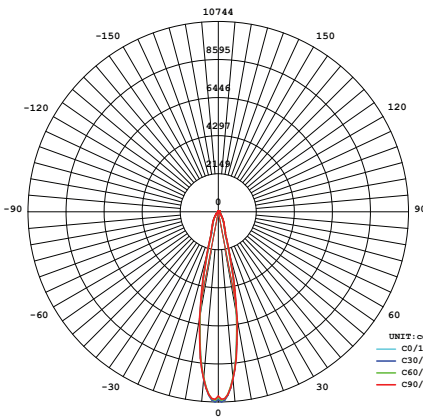

Height	AVR E	CENTER E	Diameter
1.50m	3427.84lx	4693.47lx	56.91cm
2.00m	1928.16lx	2640.07lx	75.89cm
4.00m	482.04lx	660.02lx	151.76cm
4.50m	380.87lx	521.50lx	170.73cm
6.00m	214.24lx	283.34lx	227.64cm

Angle: 21.5deg

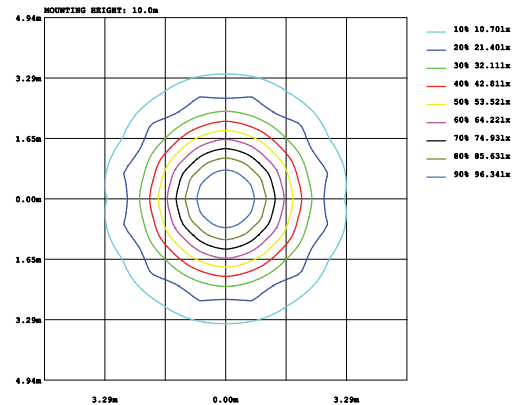

Parameter of FL-EG30 | CCT 4000K

### INSTALLATION INSTRUCTIONS

1. Mark the position of the 2 fixing holes
2. Connect the main line to the power wire of the lamp
3. Adjust the yoke to your desired angle
4. Finished

### PACKING

→ 1 pcs →