


FSB-5050-RGBW-6000K-L60

IP33


**24
VDC**

RoHS

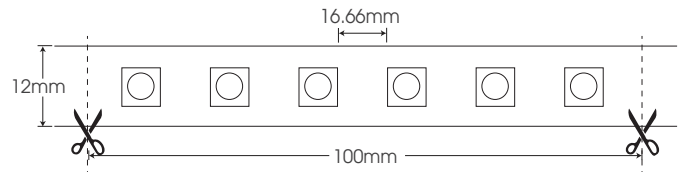

Model	Power	Led chip	Type leds	Led Qty.	CRI	CCT
FSB-5050-RGBW-6000K-L60	19.2 W/meter	EPISTAR (Taiwan)	SMD5050	60 leds/meter	>80	Adjust CCT: RGB+Cold white (6000K), Adjust 256 color + White (6000K)



PACKING

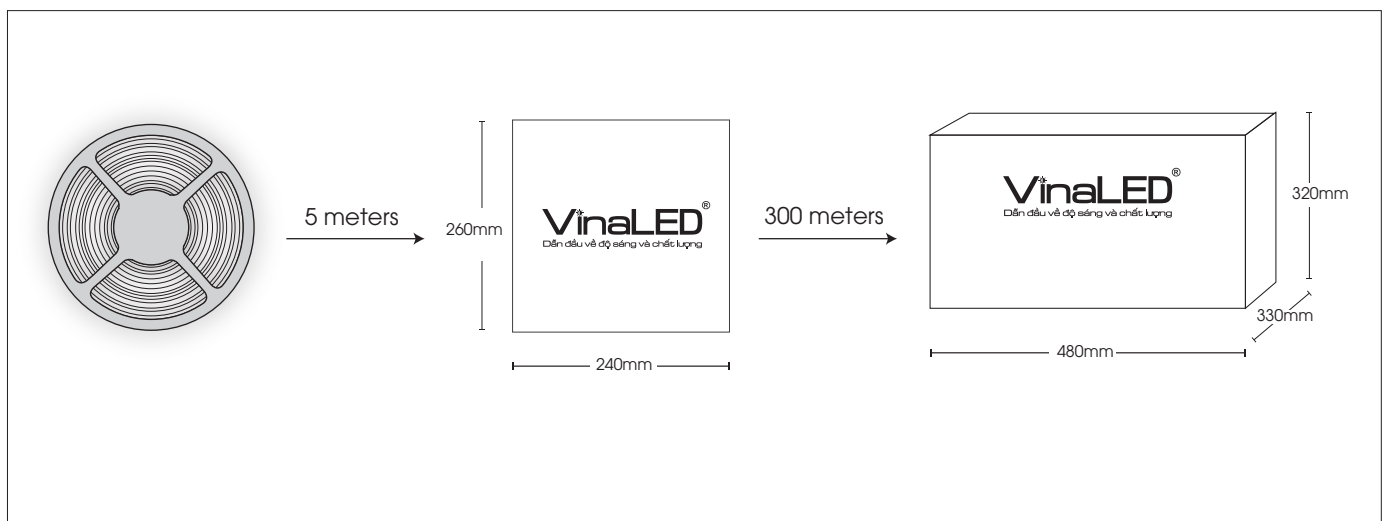


INSTALLATION INSTRUCTIONS

A. MONOCHROME FLEXIBLE LED STRIP

1. Connect 1 segment ≤ 7m

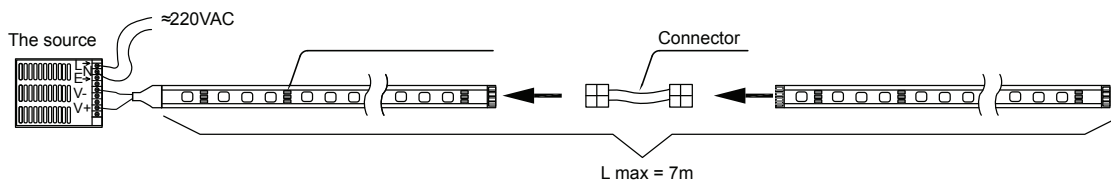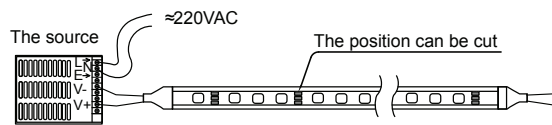


2. Connect many segment :

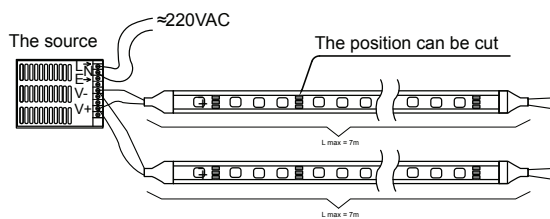


Note: The maximum length from the output of the source to the leds rope is 20m

B. CORRECT FORMAT INSTALLATION INSTRUCTIONS


1. Prepare

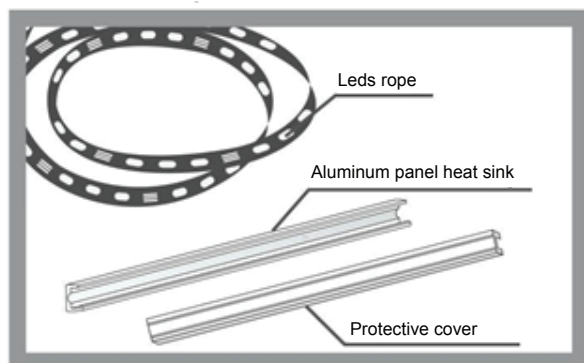

2. Aluminum panel installation heat sink

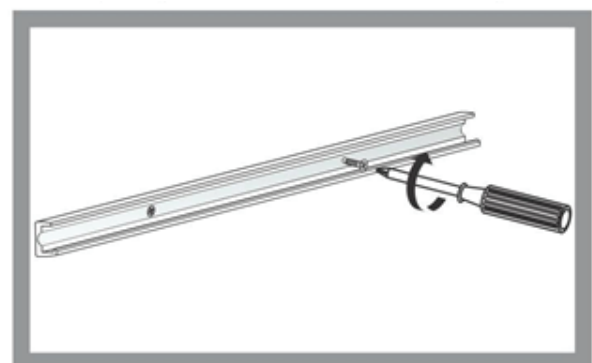

3. Paste rope led

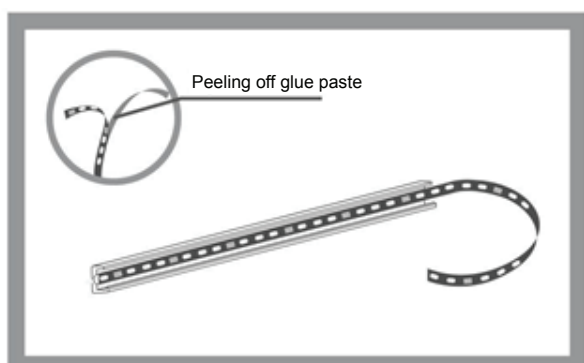

4. Install protective cover

