

ISO 9001:2015

### HB-DS140

Silver




3000K 3500K 4000K 5000K 5700K

>50,000  
Hours

100-240  
VAC


RoHS

CE




Ø180mm


120°




90°



60°



45°






Model	Power	Led source	Beam angle	CCT	CRI	Flux
HB-DS140	140W	Lumileds(USA)	45°/60°/90°/120°	>80	3000K	15300lm
					4000K	16285lm
					5000K	16285lm
					5700K	

#### LAMP PHOTOMETRIC REPORT

#### AVERAGE AND CENTER E Figure

#### ISOLUX DIAGRAM

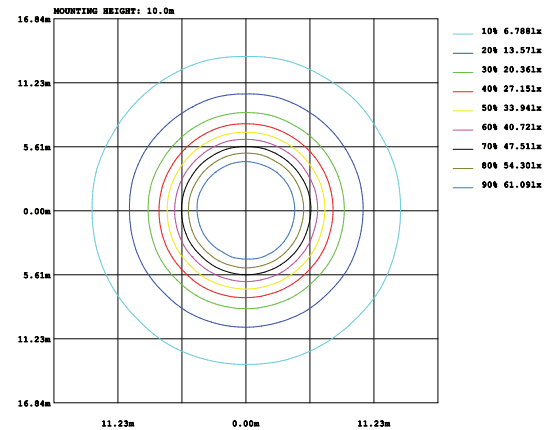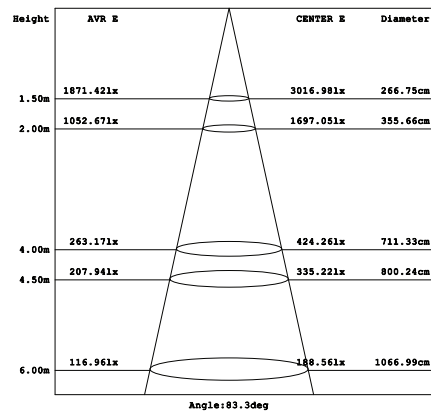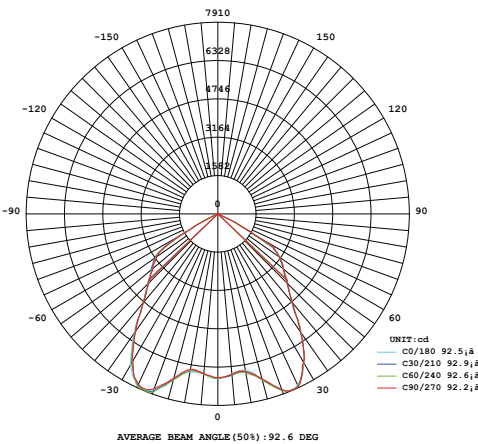

Parameter of HB-DS140 | CCT 4000K


#### INSTALLATION INSTRUCTIONS

1. Check the chain linkage, make sure the chain link to bear the weight of the lamp
2. Mount the hook on the lamp
3. Hang the lights on the chain hooks have




Weight: 3.8kg

#### 4. Wiring harness



#### 5. Install reflective headlight on the light



Note:  
 • Disconnect power, safety checking whole power system before construction.  
 • All radiator parts are not exposed directly to iron or steel

#### PACKING

