
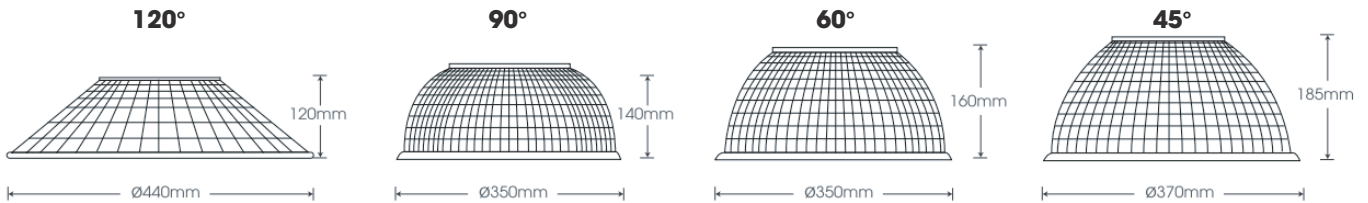


HB-DS220

Silver






Model	Power	Led source	Beam angle	CCT	CRI	Flux
HB-DS220	220W	Lumileds(USA)/ Cree(USA)*	45°/60°/90°/120°	>80	3000K	23770lm
					4000K	25365lm
					5000K	25365lm
					5700K	

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

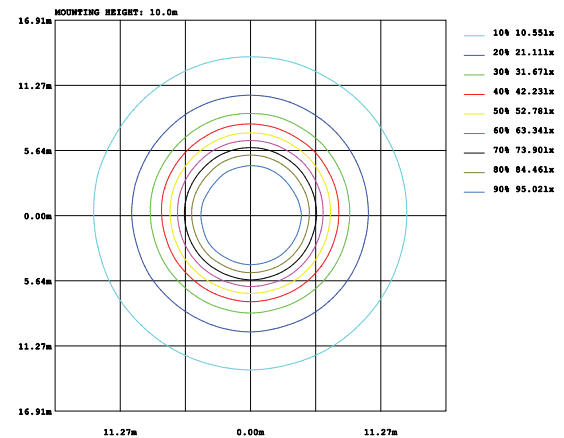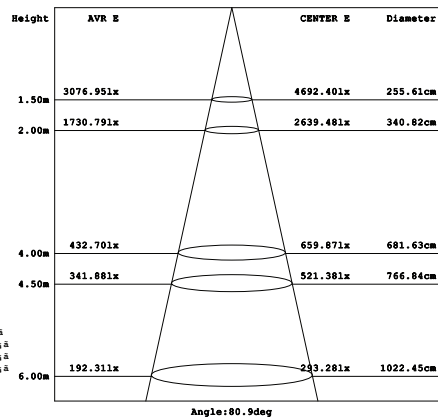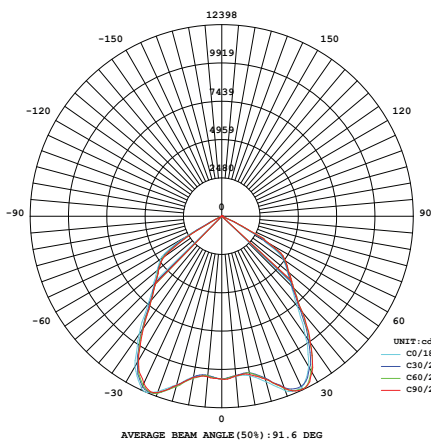

Parameter of HB-DS220 | CCT 4000K

INSTALLATION INSTRUCTIONS


1. Check the chain linkage, make sure the chain link to bear the weight of the lamp
2. Mount the hook on the lamp
3. Hang the lights on the chain hooks have




Weight: 6.2kg

Note:
 • Disconnect power, safety checking whole power system before construction.
 • All radiator parts are not exposed directly to iron or steel

4. Wiring harness



5. Install reflective headlight on the light



PACKING

