
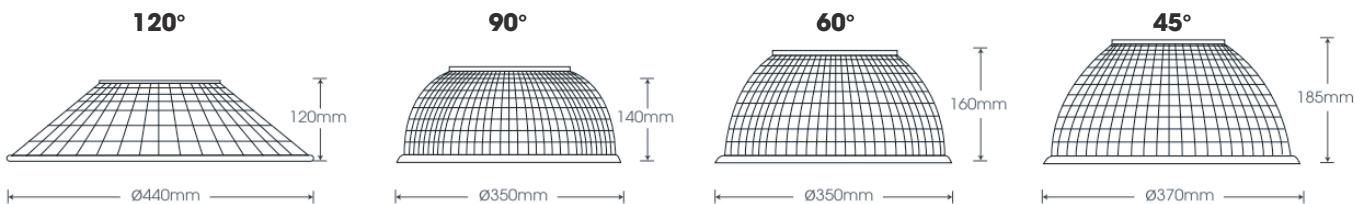


## HB-DS240

Silver



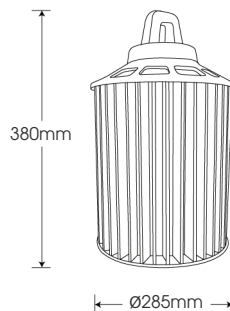


Model	Power	Led source	Beam angle	CCT	CRI	Flux
HB-DS240	240W	Lumileds(USA)/ Cree(USA)*	45°/60°/90°/120°	>80	3000K	25330lm
					4000K	26825lm
					5000K	26825lm
					5700K	

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure


### ISOLUX DIAGRAM

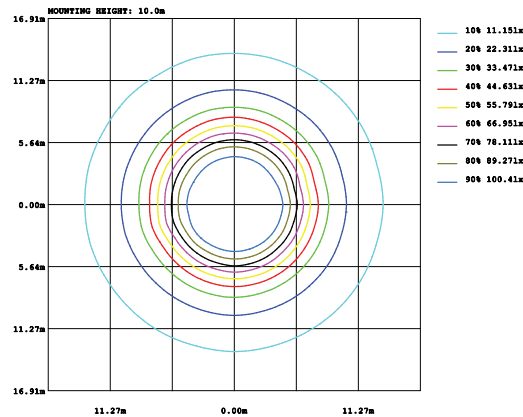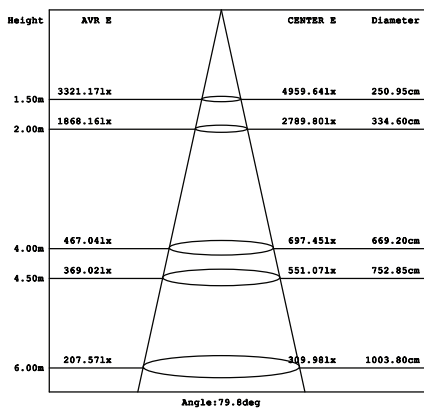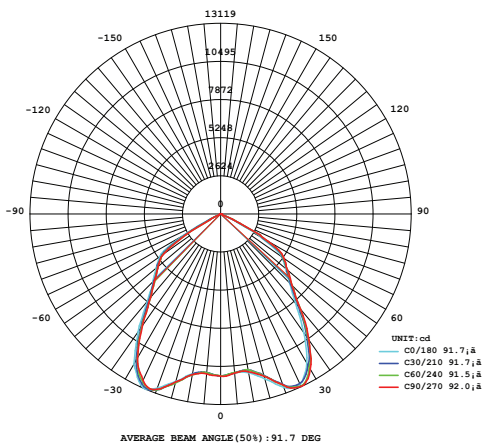

Parameter of HB-DS240 | CCT 4000K

### INSTALLATION INSTRUCTIONS


1. Check the chain linkage, make sure the chain link to bear the weight of the lamp
2. Mount the hook on the lamp
3. Hang the lights on the chain hooks have




Weight: 6.2kg

Note:  
 • Disconnect power, safety checking whole power system before construction.  
 • All radiator parts are not exposed directly to iron or steel

4. Wiring harness



5. Install reflective headlight on the light

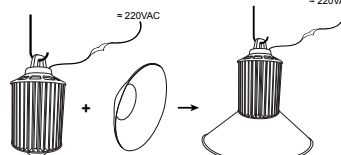

### PACKING

