

3000K 3500K 4000K 5000K 5700K

>50.000
Hours


100-240
VAC

RoHS

CE


HB-DS90

Silver




Ø180mm


120°




90°



60°



45°






Model	Power	Led source	Beam angle	CCT	CRI	Flux
HB-DS90	90W	Lumileds(USA)/ Cree(USA)*	45°/60°/90°/120°	>80	3000K	9805lm
					4000K	10520lm
					5000K	10520lm
					5700K	

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure


ISOLUX DIAGRAM

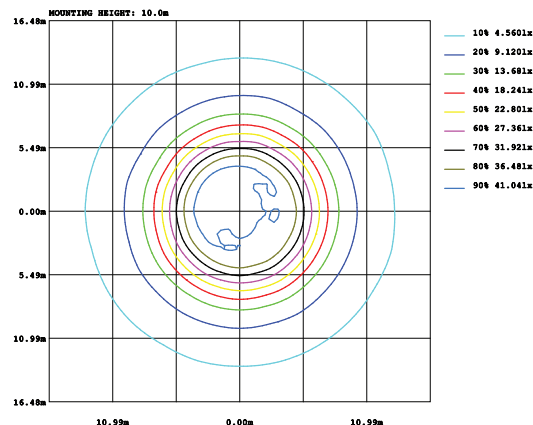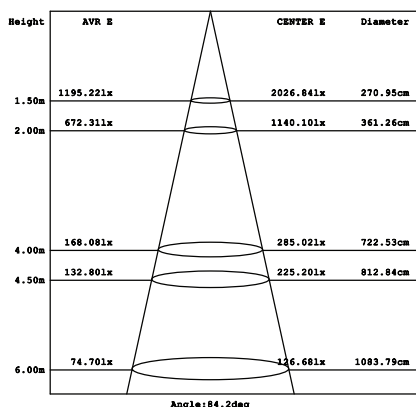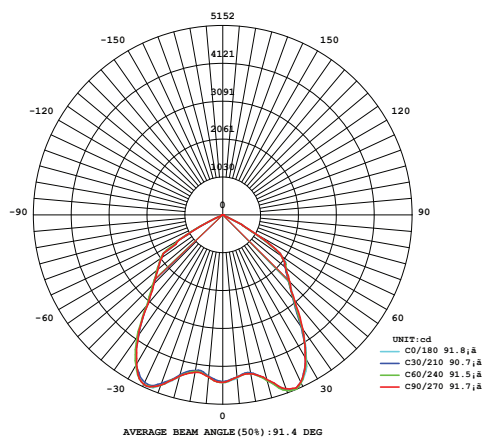

Parameter of HB-DS90 | CCT 4000K

INSTALLATION INSTRUCTIONS


1. Check the chain linkage, make sure the chain link to bear the weight of the lamp
2. Mount the hook on the lamp
3. Hang the lights on the chain hooks have




Weight: 3.2kg

Note:
 • Disconnect power, safety checking whole power system before construction.
 • All radiator parts are not exposed directly to iron or steel

4. Wiring harness



5. Install reflective headlight on the light



PACKING

