

OS-BG6

3000K 4000K 6000K

CRI
 >80


>30.000
 Hours

IP65

RoHS

CE

Grey

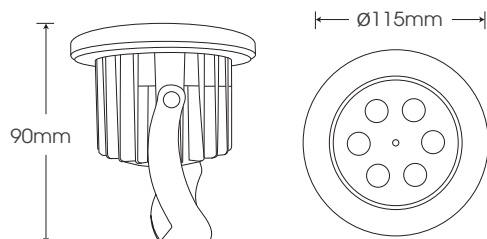


Model	Power	Led source	Led Qty.	Beam angle	Input voltage	CCT	Flux
OS-BG6	6W	OSRAM	6	5°/10°/15°/30°/45°	AC85-265VAC/ 12VDC/ 24VAC/ 24VDC	3000K	455lm
						4000K	530lm
						6000K	530lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure


ISOLUX DIAGRAM

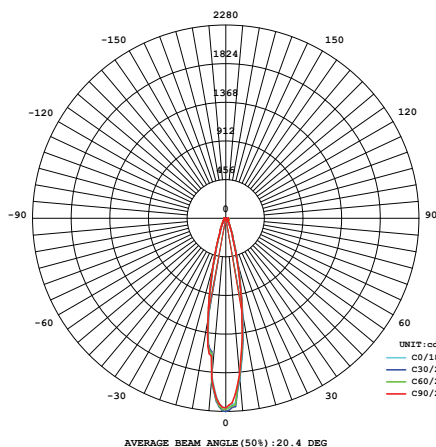

Height	AVR E	CENTER E	Diameter
1.50m	698.69lx	998.49lx	54.04cm
2.00m	393.01lx	561.65lx	72.05cm
4.00m	98.25lx	140.41lx	144.11cm
4.50m	77.63lx	110.94lx	162.12cm
6.00m	43.67lx	62.41lx	216.16cm

Angle: 20.4deg

Parameter of OS-BG6 | CCT 4000K

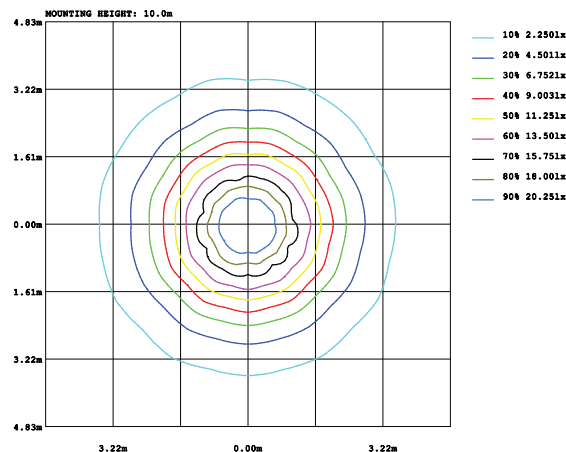

INSTALLATION INSTRUCTIONS

PACKING

