


OS-CG36

Grey



3000K 4000K 6000K Red Green Blue

CRI >70 >30.000 Hours IP65 RoHS CE

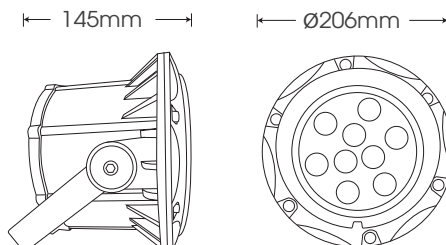


Model	Power	Led source	Led Qty.	Beam angle	Input voltage	CCT	Flux
OS-CG36	36W	OSRAM	18	5°/10°/15°/30°/45°	AC85-265VAC/ 12VDC/ 24VAC/ 24VDC	3000K	2155lm
						4000K	2340lm
						6000K	2340lm


LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

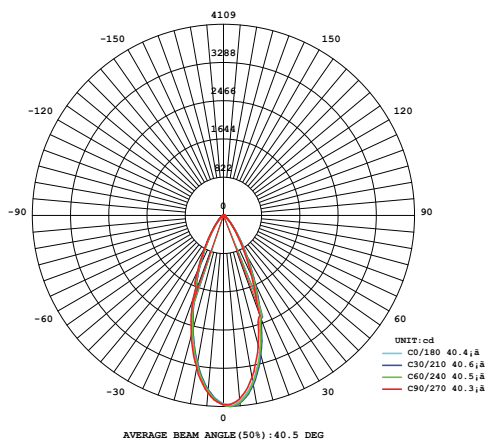

Height	AVR E	CENTER E	Diameter
1.50m	1195.19lx	1799.78lx	109.98cm
2.00m	672.29lx	1012.38lx	146.64cm
4.00m	168.07lx	253.09lx	293.29cm
4.50m	132.80lx	199.98lx	329.95cm
6.00m	74.70lx	112.49lx	439.93cm

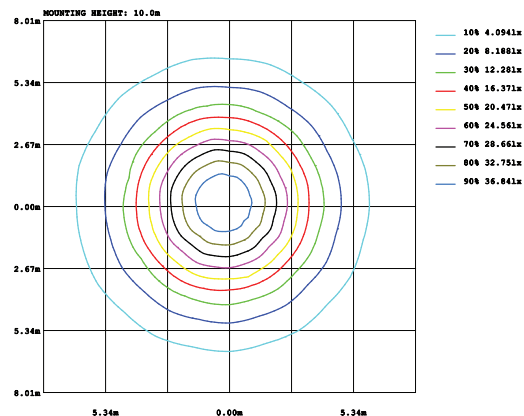

Parameter of OS-CG36 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Use the hexagonal rod to remove the bracket from the lamp

2. Install a fixed to the location to fix lamp

3. Install the lamp on the price

4. Connected wire with 220VAC power