


3000K 4000K 6000K Red Green Blue

CRI >70 >30.000 Hours IP65 RoHS CE

## OS-FG48

Grey



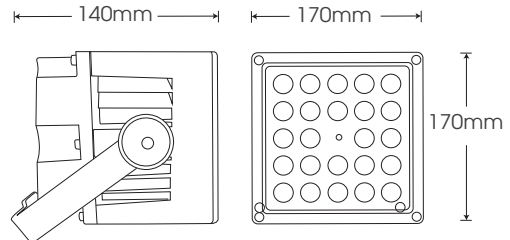


Model	Power	Led source	Led Qty..	Beam angle	Input voltage	CCT	Flux
OS-FG48	48W	OSRAM	24	5°/10°/15°/30°/45°	AC85-265VAC/ 12VDC/ 24VAC/ 24VDC	3000K	3775lm
						4000K	4050lm
						6000K	4050m

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

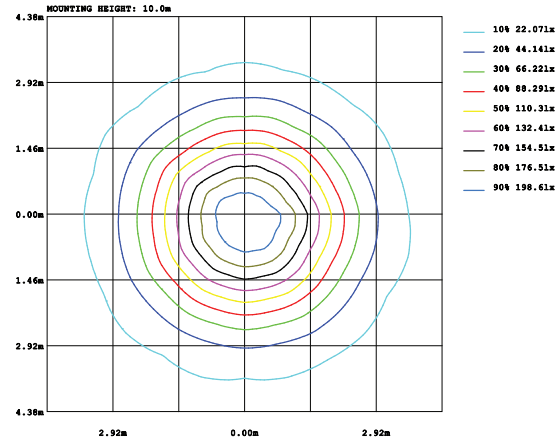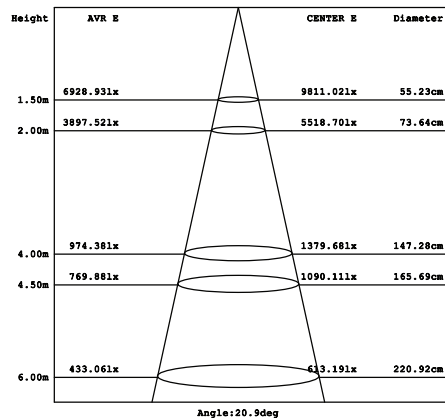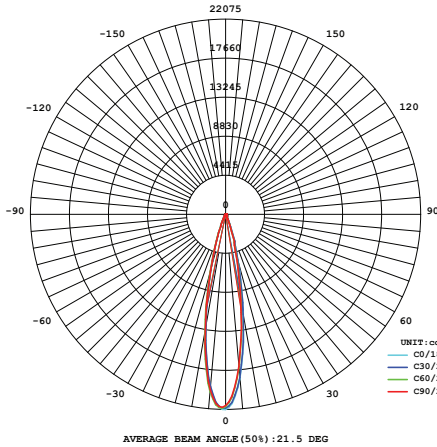

Parameter of OS-FG48 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Use the hexagonal rod to remove the bracket from the lamp.
- Install a fixed to the location to fix lamp.
- Install the lamp on the price.
- Connected wire with 220VAC power.

### PACKING